# **ACCESSORIES FOR MUTING**

Some models of Safety Light Curtains series SG BODY COMPACT MUTING and SG BODY REFLECTOR MUTING are provided with active/passive muting arms in the packaging, but it's also possible to add muting arms as accessories (if the light curtain has integrated muting function). Instead of using the active/passive arm couple, in which on side is an active sensor, and the other is a passive reflector, in order to reach longer operating distance or to contrast the effect of environmental conditions, is possible to order also "F/G" muting arm couples, composed by an emitter and a receiver arm.

IMPORTANT NOTICE: For safety reasons, L muting arms should be used only for openings through which goods must exit from the dangerous area; for openings in which goods must enter the dangerous area, as well as for bi-directional movements, use T muting arms.





# **Integrated Muting Arms**

#### **ACTIVE/PASSIVE ARMS**

MODEL	DESCRIPTION	ORDER NUMBER
SG-L-ARMS V2	Active/Passive arms Couple for L muting	95ASE1861
SG-T-ARMS V2	Active/Passive arms Couple for T muting	95ASE1871
SG-AS-ARM V2	Active sensor single arm	95ASE1841
SG-PR-ARM V2	Passive reflector single arm	95ASE1851

### **EMITTER/RECEIVER ARMS**

SG-F1-G1-ARMS	Emitter/Receiver arms couple (first couple)	95ASE1880		
SG-F2-G2-ARMS	Emitter/Receiver arms couple (second couple)	95ASE1890		



# **BRACKETS AND CABLES**


MODEL	DESCRIPTION	ORDER NUMBER		
SG-CB-B	Muting arms mounting bracket kit for BIG series	95ASE1920		
SG-CB-C	Muting arms mounting bracket kit for COMPACT series	95ASE1930		
CV-Y1-02-B-007	M12 4 pole T muting cable	95ACC2560		
CV-L1-02-B-007	M12 4 pole L muting cable	95ACC2570		




# **COMPATIBILITY AND OPERATING DISTANCES**


MUTING ARM	LIGHT CURTAIN	OPERATING DISTANCE  0.5 3 m		
SG-L-ARMS V2 SG-T-ARMS V2	SG BODY COMPACT MUTING SG2 MUTING SG4 EXTENDED			
SG-AS-ARM V2 SG-PR-ARM V2	SG BODY COMPACT MUTING SG BODY REFLECTOR MUTING SG2 MUTING SG4 EXTENDED SG4 BODY BIG MUTING SHORT RANGE A	0.5 3 m		
SG-F1-G1-ARMS SG-F2-G2-ARMS	SG2 BODY BIG MUTING SG4 BODY BIG MUTING SHORT RANGE A SG BODY COMPACT MUTING	0.5 7 m		


A SG4 BODY MUTING LONG RANGE (whose operating range is 6 ... 60 m) can't be used in combination with muting arms.







SG-AS-ARM V2



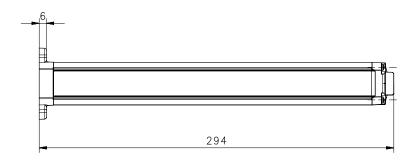

SG-PR-ARM V2

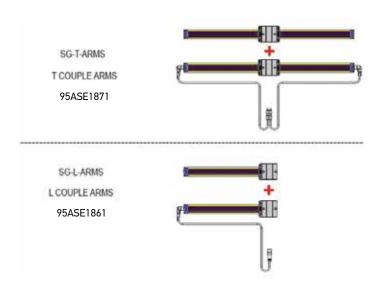


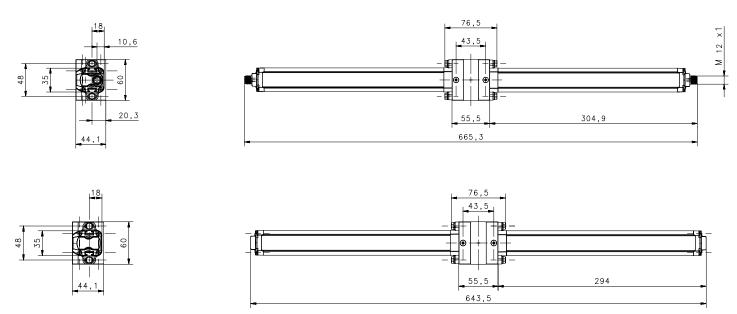

SG-PR-ARM V2 (T muting cable CV-Y1-02-B-007 is included)

100 CATALOG | Safety 

DATALOGIC

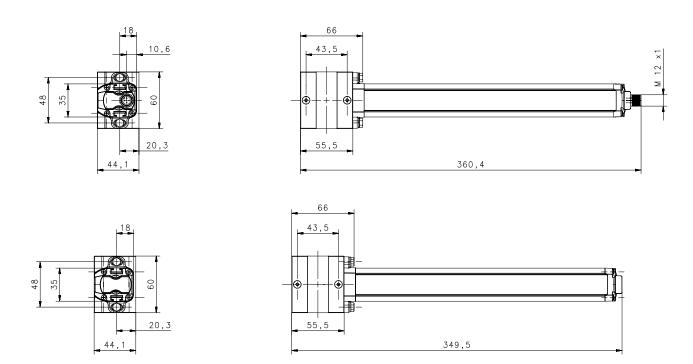

SG-L-ARMS V2 (L muting cable CV-L1-02-B-007 is included)

# **ORDERING SUMMARY TABLE FOR MUTING ACCESSORIES**

SAFETY LIGHT CURTAIN	MUTING	TYPE	SG-L- ARMS V2	SG-T- ARMS V2	SG-AS- ARM V2	SG-PR- ARM V2	SG-CB-B	SG-CB-C	CV-L1- 02-B-007	CV-Y1- 02-B-007	SG-F1G1- ARMS	SG-F2G2- ARMS
	L	RRX			1	1	2		1			
	Ţ	RRX			2	2	2			1		
SG BODY BIG MUTING	L	F/G					2		2		1	
m ~	T	F/G					2			2	1	1
SG BODY REFLECTOR (ACTIVE AND PASSIVE SIDES)	L	RRX			1	1	2		1			
SG B REFLE (ACTIV PASS	Т	RRX			2	2	2			1		
	L	RRX	1									
SG BODY COMPACT MUTING	L	RRX			1	1		2	1			
	T	RRX		1								
ACI B	T	RRX			2	2		2		1		
	L	F/G						2	2		1	
	T	F/G	1					2		2	1	1
SG2 MUTING SG4 EXTENDED	L	RRX	1									
	Т	RRX		1								

## NOTES

RRX = Active/Passive retroreflective muting arms F/G = Emitter/Receiver muting arms

#### EXAMPLES

Rev. 07, 05/2020

<sup>1)</sup> To realize an L muting with retroreflective arms starting from a SG BODY COMPACT MUTING, order the complete kit SG-L-ARMS or, in alternative, the following: 1x SG-AS-ARM, 1x SG-PR-ARM, 2X SG-CB-C, 1X CV-L1-02-B-007.

<sup>2)</sup> To realize a T multing with emitter/receiver arms, starting from a SG BODY BIG MUTING, order the following: 2x SG-CB-B, 2x CV-Y1-02-B-007, 1x SG-F1G1-ARMS, 1x SG-F2G2-ARMS.