


## SG-LS SERIES INSTRUCTION MANUAL

### MOUNTING INSTRUCTIONS

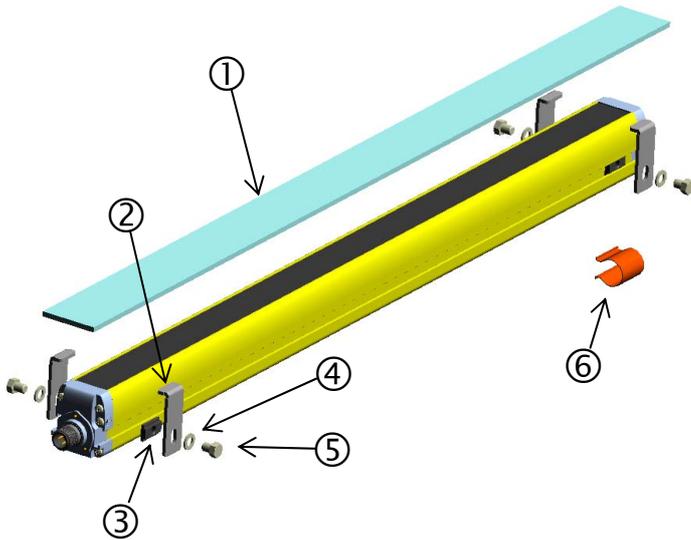

- ① Transparent PMMA plate (5 pieces)
- ② Fixing bracket \*
- ③ M5 nut\*
- ④ UNI 6592 Di = 5.3 washer \*
- ⑤ TE M5x6 UNI 5739 screws\*
- ⑥ Elastic blocking spring \*

\* ② ③ ④ ⑤ parts:

• 4 pieces for:


SG-LS from 150 to 1050  
SG-LS-2 050  
SG-LS-3 080  
SG-LS-4 090;

• 6 pieces for:


SG-LS from 1200 to 1800  
SG-LS-4 120

### FIXING INSTRUCTIONS

Build the subassembly, shown in Fig.1 and 2, screwing ⑤ screw to the ③ nut but not completely in order to leave space for ② and ③ parts (refer to Fig.2).

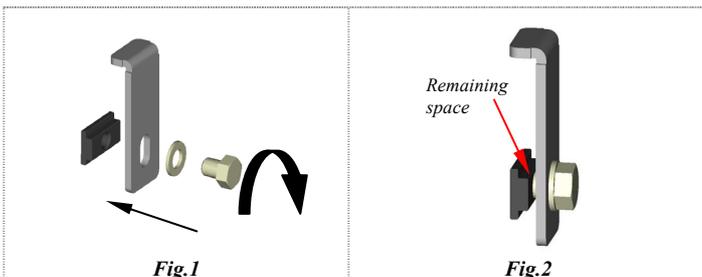


Slide the subassemblies in the product groove (SG series or SE series) as shown in Fig.3, to obtain, for example, the Fig.4 condition. Please refer to the specific datasheet for the recommended fixing positions.

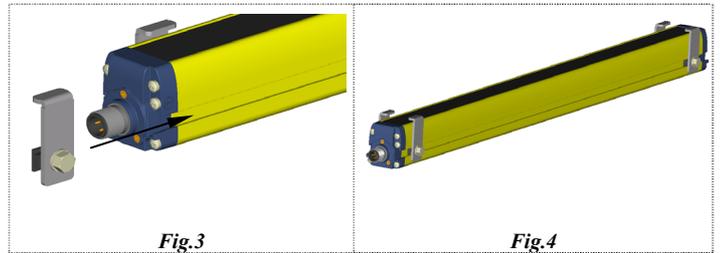


Insert the transparent plate and slide it along the binary under the fixing brackets. Once positioned correctly, tighten the screws with the N° 8 key, pressing the fixing bracket on the plate, until all the fixing brackets are blocked safely.

In case of replacement, untighten the ⑤ screws without removing them, unslide the plate and then replace it. An accessory kit of 4 elastic fasteners (⑥) is available to avoid nut (③) sliding inside the groove in vertical mounting.

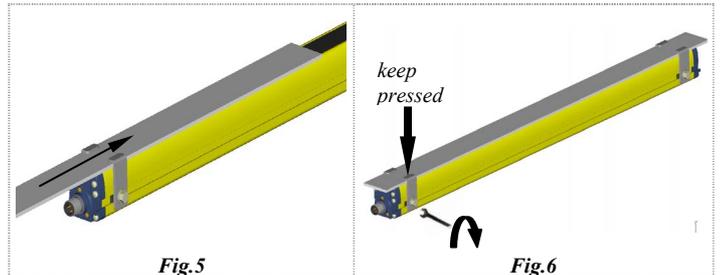

**NOTE:** ESPE maximum operating distance is reduced of 10% for each couple of "LENS" SHIELD" used (one for TX unit and one RX unit).

### DIMENSIONS

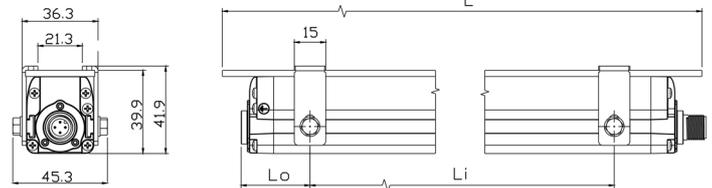

Dimension in millimeters									
SG2, SG4B, SE Hand/Finger protection					SE Body protection				
	VERS.	L	Li	Lo	VERS.	L	Li	Lo	
n°2+2 brackets	015	245	160	30	2r 050	642	490	75	n°2+2 brackets
	030	392	345	45	3r 080	942	640	175	
	045	540	400	60	4r 090	1042	660	200	
	060	686	520	75	4r 120	1342	480	200	
	075	832	590	115					
	090	980	640	175					
105	1126	740	200						
n°3+3 brackets	120	1274	445	200	n°3+3 brackets				
	135	1422	520	200					
	150	1568	595	200					
	165	1715	670	200					
	180	1860	745	200					

Datalogic S.r.l.

Via S. Vitalino 13 - 40012 Calderara di Reno - Italy  
Tel: +39 051 3147011 - Fax: +39 051 3147205 - www.datalogic.com

Helpful links at [www.datalogic.com](http://www.datalogic.com): [Contact Us](#), [Terms and Conditions](#), [Support](#).

The warranty period for this product is 36 months. See General Terms and Conditions of Sales for further details.

Under current Italian and European laws, Datalogic is not obliged to take care of product disposal at the end of its life. Datalogic recommends disposing of the product in compliance with local laws or contacting authorised waste collection centres.

© 2009 - 2017 Datalogic S.p.A. and/or its affiliates • ALL RIGHTS RESERVED. • Without limiting the rights under copyright, no part of this documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means, or for any purpose, without the express written permission of Datalogic S.p.A. and/or its affiliates. Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U. All other trademarks and brands are property of their respective owners. Datalogic reserves the right to make modifications and improvements without prior notification.