


NX

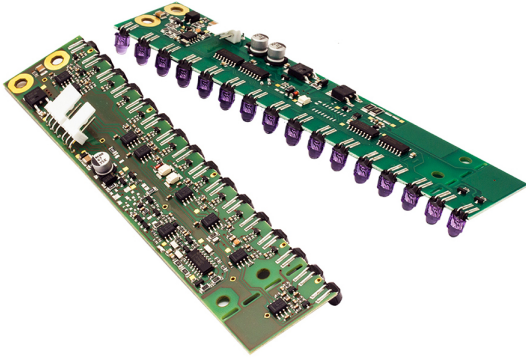

NX16SR/XAP-C01020

Area Sen,h=157mm-10mm pitch,E+R
MEDIUM RESOLUTION AREA SENSORS WITHOUT HOUSING

OVERVIEW

- Complete protection against electrical damages
- LED indicators
- Crossed beams detection
- Without housing
- 16 or 14 optics
- Detection of goods in automatic vending machines
- Detection of objects with irregular shape

TECHNICAL FEATURES

Detection properties

Nominal sensing distance	0,25 ... 0,7m
Beams space	10mm
controlled height	150mm
minimum detectable object	Ø 5mm
number of rays	16
Sensitivity adjustment	Yes

Application

Function Principle	emitter+receiver
--------------------	------------------

Outputs

Output type	PNP
-------------	-----

Output Function	NO
-----------------	----

Switching frequency	130Hz
---------------------	-------

Resposnse time for light/dark transition	500μs
--	-------

Resposnse time for dark/light transition	7ms
--	-----

Electrical data

Operating Voltage	10...26VDC
-------------------	------------

No-Load supply current	150mA (emitter) - 25mA (receiver)
------------------------	-----------------------------------

Load current	100mA
--------------	-------

Leakage current	< 10μA @ 26V
-----------------	--------------

Output voltage drop	≤2V@100mA
---------------------	-----------

Max ripple content	10%
--------------------	-----

LED indicators	emitter: yellow (poweON and emission active) - receiver: red (signal level) - yellow (output state active)
----------------	--

Time delay before availability	< 85 ms
--------------------------------	---------

Short-circuit protection	Yes
--------------------------	-----

Reverse Polarity Protection	Yes
Emission	Infrared (880nm)
Interference to external light	1000lux (incandescent light) - 1500lux (sunlight)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	157 x 36 x 18mm
Weight	104g
Connections	With PCB connectors / Emitter, Conn. 3 MOLEX 22-05-7038 - Positive, Check, Common / Receiver, Conn. 1 MOLEX 22-05-7038 - Positive, Check, Common / Receiver, Conn. 2 MOLEX 22-05-7048 Positive, Check, Output, Common
Operating temperature	0°C...+ 55° C (without freeze)

Test/Approvals


Degree of protection	Not defined
----------------------	-------------

Generical Data

Dimensions	157x36x18
Operating Temperature	0°C...+ 55° C (without freeze)
Mechanical Protection	Not defined


CONNECTIONS

Eletrical diagram

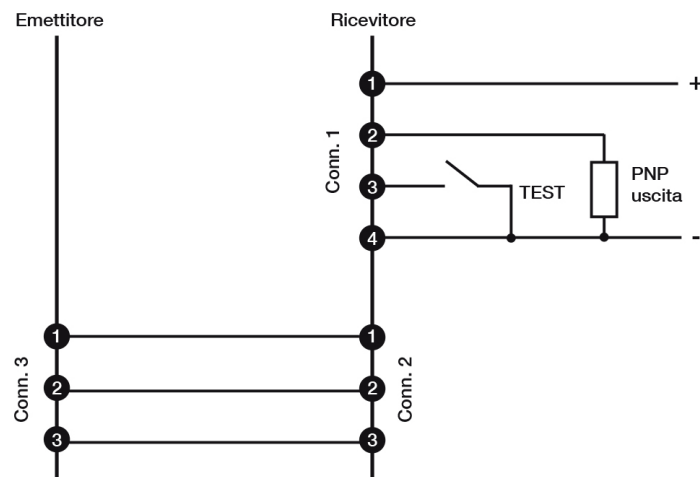

OTHERS

Dimensions

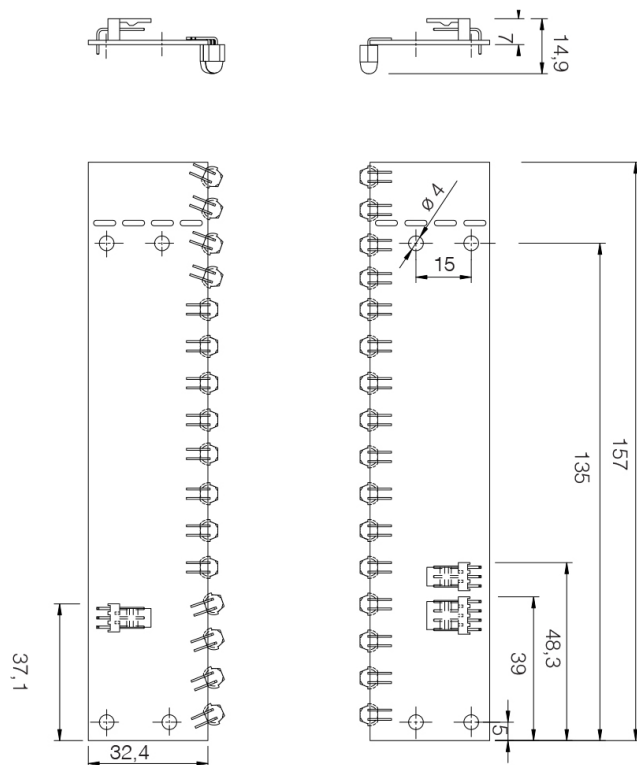

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
02:53:19