

BX80

BX80B/3P-1H

Area Sen, H=70mm-6mm pitch,Receiver
HIGH RESOLUTION CUBIC HOUSING AREA SENSOR

OVERVIEW

- Controlled height 70 mm
- Operating distance up to 2 m
- Microprocessor based circuit
- Sensitivity adjustment
- Strong cubic housing
- Special version with metallic enclosure for high-duty use
- Protection degree IP67
- Complete protection against electrical damages



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	0,5... 1m
--------------------------	-----------

Thermal drift of Sr	≤10%
---------------------	------

Beams space	6mm
-------------	-----

controlled height	70mm
-------------------	------

minimum detectable object	Ø 5mm
number of rays	12

Application

Function Principle	Receiver
--------------------	----------

Outputs

Output type	PNP
Output Function	NO/NC
Response time	3ms

Electrical data

Operating Voltage	12...24 VDC
No-Load supply current	50mA
Load current	≤100mA
Leakage current	10µA
Output voltage drop	≤1.2V Iload =100mA
Max ripple content	≤ 10%
LED indicators	Green (powerON), red (alignment), yellow (output state)
Time delay before availability	500ms
Short-circuit protection	Yes (auto reset)
Reverse Polarity Protection	Yes

Interference to external light	1.500 lux max. (incandescent lamp), 4.500 lux max. (sunlight)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	60mm x 132mm x 30mm
Housing material	PBT
Weight	260 ... 300g
Connections	M12 plug
Active Head Material	PC
Tightening torque	25Nm
Operating temperature	-25°C...+50°C (without freeze)
Storage temperature	-40°C...+80°C

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2
Degree of protection	IP67

Accessories

Supplied Accessories	2 nuts M18x1 - 1 adjustment key - 1 90°angled brackets
----------------------	--

Generical Data


Dimensions 60x132x30

Operating Temperature -25°C...+50°C (without freeze)

Mechanical Protection IP67

CONNECTIONS

Electrical diagram

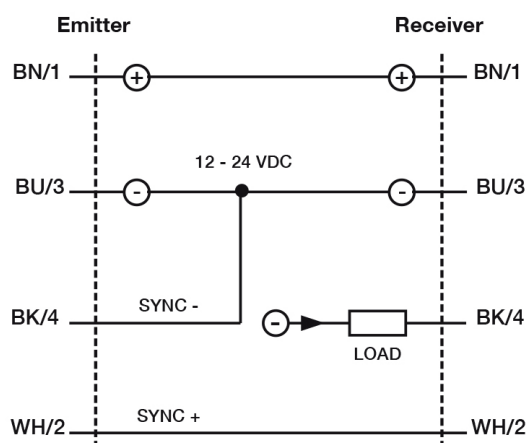

BN brown

BU blue


BK black

WH white

Connector



OTHERS

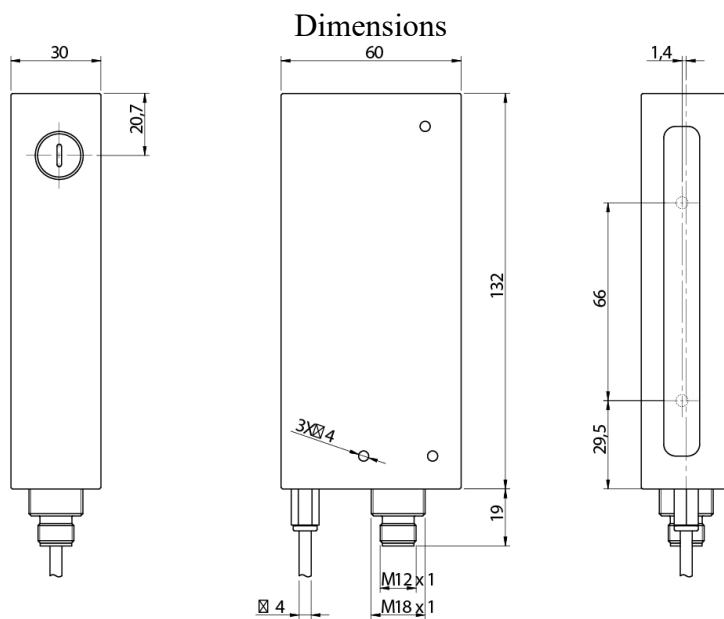

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
08:36:04