



BX80

BX80S/50-0H3E

Area Sen, H=70mm-6mm pitch,Emitter
HIGH RESOLUTION CUBIC HOUSING AREA SENSOR

OVERVIEW

- Controlled height 70 mm
- Operating distance up to 2 m
- Microprocessor based circuit
- Sensitivity adjustment
- Strong cubic housing
- Special version with metallic enclosure for high-duty use
- Protection degree IP67
- Complete protection against electrical damages



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	depending on the receiver
--------------------------	---------------------------

Thermal drift of Sr	≤10%
---------------------	------

Beams space	6mm
-------------	-----

controlled height	70mm
-------------------	------

number of rays	12
----------------	----

Sensitivity adjustment	Yes
------------------------	-----

Application

Function Principle	Emitter
--------------------	---------

Outputs

Output type	Emitter
-------------	---------

Output Function	Emitter
-----------------	---------

Electrical data

Operating Voltage	12...24 VDC
-------------------	-------------

No-Load supply current	100mA
------------------------	-------

Max ripple content	≤ 10%
--------------------	-------

LED indicators	Green (powerON)
----------------	-----------------

Time delay before availability	500ms
--------------------------------	-------

Short-circuit protection	Yes (auto reset)
--------------------------	------------------

Reverse Polarity Protection	Yes
-----------------------------	-----

Emission	Infrared (880nm)
----------	------------------

Interference to external light	1.500 lux max. (incandescent lamp), 4.500 lux max. (sunlight)
--------------------------------	---

Impulsive Overvoltage Protection	Yes
----------------------------------	-----

Mechanical data

Dimensions	44mm x 120mm x 20mm
Housing material	PBT
Weight	260 ... 300g
Connections	M12 plug
Active Head Material	PC
Tightening torque	25Nm
Operating temperature	-25°C...+50°C (without freeze)
Storage temperature	-40°C...+80°C

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2
Degree of protection	IP67

Accessories


Supplied Accessories	2 nuts M18x1 - 1 adjustment key - 1 90°angled brackets
----------------------	--

Generical Data


Dimensions	45x145x20
Operating Temperature	-25°C...+50°C (without freeze)

CONNECTIONS

Eletrical diagram

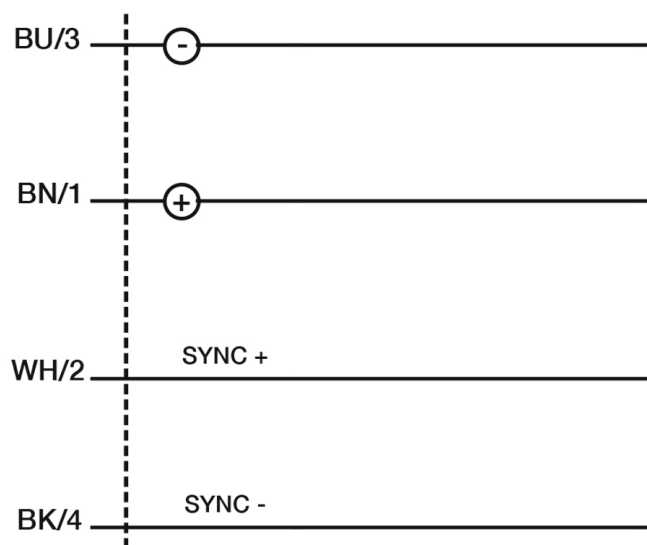


Connector

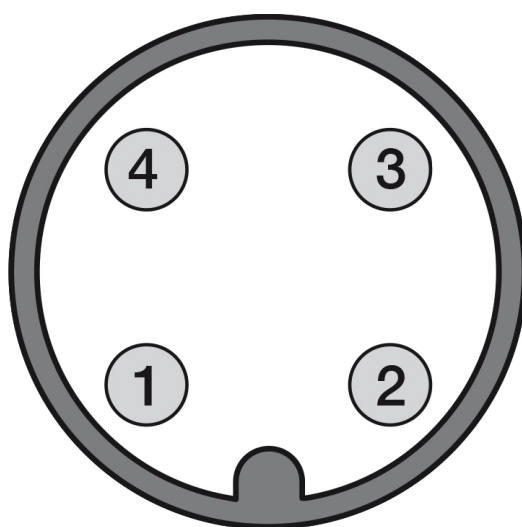

OTHERS

Dimensions

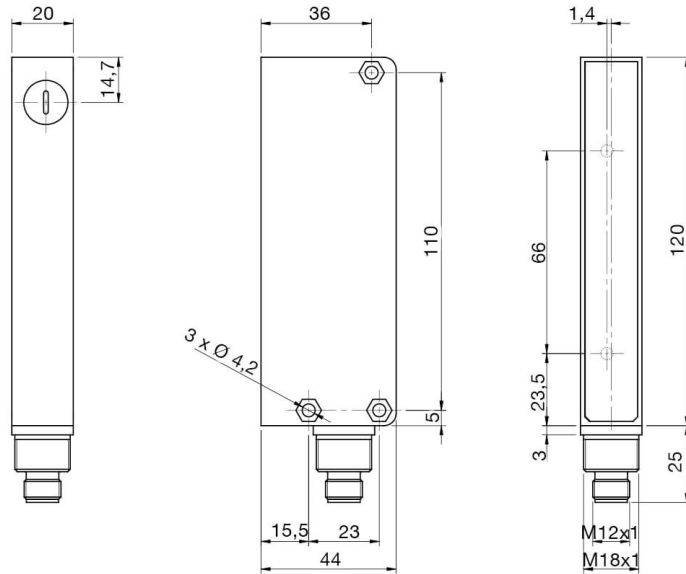**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
01:58:41