



BX04-BX10

BX04S/X0-HB

Area Sen, H=90mm-30mm pitch,Emitter
MEDIUM RESOLUTION AREA SENSORS

OVERVIEW

- IP67 protection degree (IP69K special model)
- Complete protection against electrical damages
- Detection of objects with irregular shape
- ATEX models, cat. 2 and cat. 3, available on request
- LED indicators
- Crossed beams detection



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	0,3 ... 2m
--------------------------	------------

Thermal drift of Sr	≤10%
---------------------	------

Beams space	30mm
-------------	------

controlled height	90mm
-------------------	------

minimum detectable object	Ø 15mm
---------------------------	--------

number of rays	4
----------------	---

Sensitivity adjustment	Trimmer
------------------------	---------

Application

Function Principle	Emitter with check
--------------------	--------------------

Outputs

Output type	Emitter
-------------	---------

Output Function	Emitter
-----------------	---------

Electrical data

Operating Voltage	10...26VDC
-------------------	------------

No-Load supply current	25mA
------------------------	------

Max ripple content	≤ 10%
--------------------	-------

LED indicators	Green (powerON)
----------------	-----------------

Time delay before availability	≤ 85ms
--------------------------------	--------

Reverse Polarity Protection	Yes
-----------------------------	-----

Emission	Infrared
----------	----------

Interference to external light	1000lux (incandescent lamp), 1500lux (sunlight)
--------------------------------	---

Mechanical data

Dimensions	45mm x 145mm x 20mm
------------	---------------------

Housing material	PBT
------------------	-----

Weight	115g
Connections	M12 Plug
Active Head Material	PC
Tightening torque	25Nm
Operating temperature	0°C...+ 50° C (without freeze)

Test/Approvals

Approvals	CE cULus
EMC compatibility	EN 60947-5-2
Degree of protection	IP67

Accessories


Supplied Accessories	4 nuts M18x1 - 1 adjustment key - 2 90°angled brackets
----------------------	--

Generical Data


Dimensions	45x145x20
Operating Temperature	0°C...+ 50° C (without freeze)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram

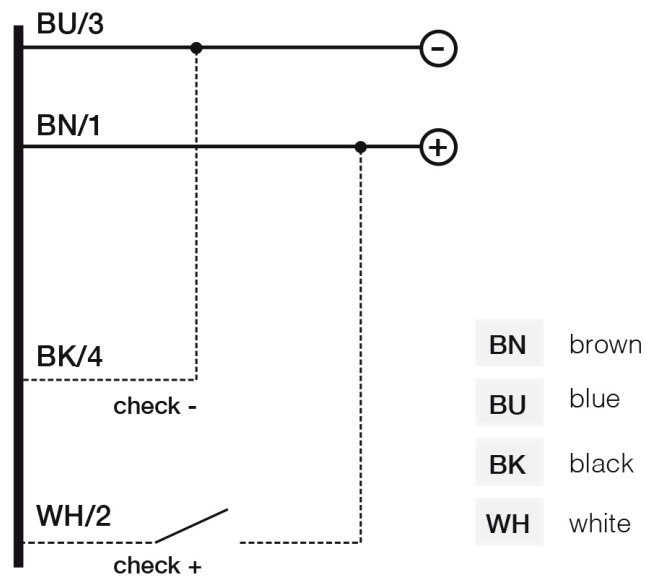


Connector

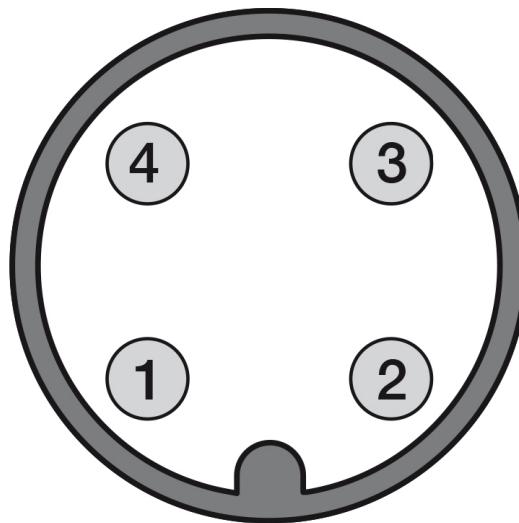

OTHERS

Dimensions

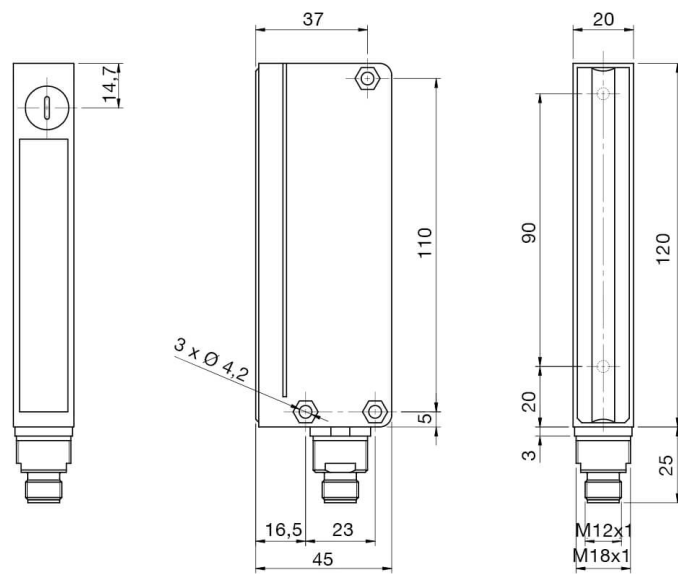

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
06:46:49