

CX2

CX2E0RA/10-016V

Area Sen, H=160mm-10mm pitch,E+R,I+V Area sensors with high resolution and compact housing with digital and analogue output

OVERVIEW

- Parallel beams and floating crossbeams with variable amplitude
- Synchronization by cable. Pitch 5, 10 and 20mm
- Control height up 480mm (pitch 5mm) and up 960mm (pitch10mm and 20mm)
- Maximum operating distance up to 3m (for 5mm pitch) and 6m (for 10mm and 20 pitch)
- Digital outputs NPN and PNP; analogue current output (4...20mA) and analogue voltage output (0..10V), mix outputs: digital PNP and analogue voltage output (0..10V)
- Adjustment by teach-in, 2 levels of adjustment
- Blanking function . Available analogue versions TOP BEAM



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	0,3 6m
Beams space	10mm
controlled height	160mm
minimum detectable object	Ø 10mm

number of rays	17
Sensitivity adjustment	Teach-in by wire
Application	
Function Principle	emitter/receiver
Outputs	
Output type	0,,,10V + 4,,,20mA
Output Function	positive/negative slope
Switching frequency	59,5Hz
Electrical data	
Operating Voltage	16,8 30Vdc
No-Load supply current	≤330mA
Load current	< 100mA
Leakage current	$\leq 10 \mu A$
Output voltage drop	< 1,5V @ 100mA
Max ripple content	< 1,2Vpp
LED indicators	Blue, red and yellow (emitter) - green, red and yellow (receiver)
Time delay before availability	< 3s
Short-circuit protection	Yes
Reverse Polarity Protection	Yes

Emission	Infrared (880nm)
Interference to external light	IEC EN 60947-5-2
Impulsive Overvoltage Protection	Yes
Mechanical data	

Dimensions	20mm x 169mm x 35mm
Weight	450g
Housing Material	Aluminium
Connections	M12 4pin + cable PVC 200mm ; M12 8pin + cable PVC 200mm
Active Head Material	PMMA
Operating temperature	-10°C+ 55° C (without freeze)
Storage temperature	- 25°C+ 60° C (without freeze)

Test/Approvals

Approvals	CE, cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2
Degree of protection	IP67


Accessories


ed Accessories


Generical Data

Dimensions	169x36x20
Operating Temperature	-10°C+ 55° C (without freeze)
Mechanical Protection	IP67

CONNECTIONS

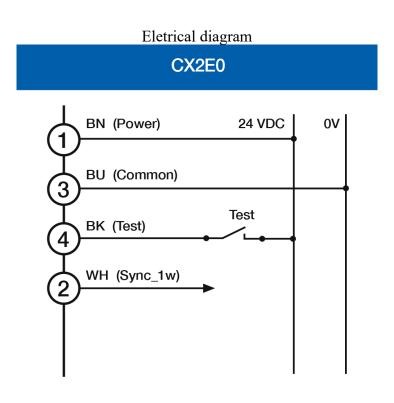


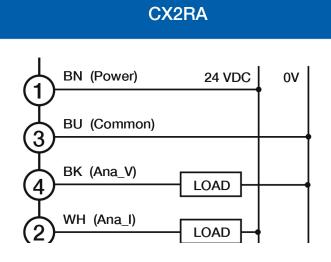


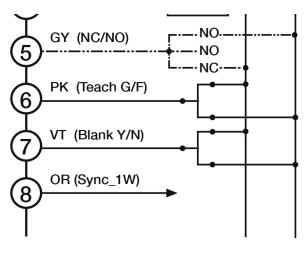

G	coarse calibration	F	fine calibration
ВК	black	BU	blue
BN	brown	GY	gray
RD	red	WH	white
PK	pink	VT	violet
OR	orange		


Connector

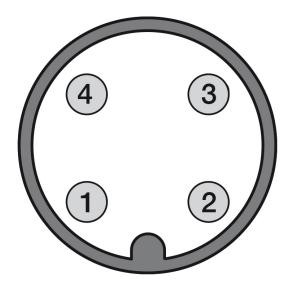

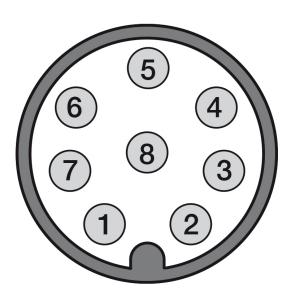

OTHERS

Dimensions



H (barrier height) = h (controlled height) + 9 mm

Datasensing

S.r.l. Strada S.Caterina, 235 41122 Modena (MO) Tel. 059 420411 Fax 059 253973 E-mail info@datasensing.com

date of **printing** 05/11/2025 23:17:36