



# CX2

## CX2E0RB/10-064V

**Area Sen, H=640mm-10mm  
pitch,E+R,NPN+PNP**

**AREA SENSORS WITH HIGH RESOLUTION AND COMPACT  
HOUSING WITH DIGITAL AND ANALOGUE OUTPUT**

## OVERVIEW

- Parallel beams and floating crossbeams with variable amplitude
- Synchronization by cable. Pitch 5, 10 and 20mm
- Control height up 480mm (pitch 5mm) and up 960mm (pitch 10mm and 20mm)
- Maximum operating distance up to 3m (for 5mm pitch) and 6m (for 10mm and 20 pitch)
- Digital outputs NPN and PNP ; analogue current output (4...20mA) and analogue voltage output (0..10V), mix outputs : digital PNP and analogue voltage output (0..10V)
- Adjustment by teach-in , 2 levels of adjustment
- Blanking function . Available analogue versions TOP BEAM



## TECHNICAL FEATURES

### Detection properties

Nominal sensing distance	0,3 ... 6m
--------------------------	------------

Beams space	10mm
-------------	------

controlled height	640mm
-------------------	-------

minimum detectable object	Ø 10mm
---------------------------	--------

number of rays	65
Sensitivity adjustment	Teach-in by wire
Application	
Function Principle	emitter/receiver
Outputs	
Output type	NPN + PNP
Output Function	NO/NC
Switching frequency	18,1Hz
Electrical data	
Operating Voltage	16,8... 30Vdc
No-Load supply current	≤330mA
Load current	< 100mA
Leakage current	≤ 10μA
Output voltage drop	< 1,5V @ 100mA
Max ripple content	< 1,2Vpp
LED indicators	Blue, red and yellow (emitter) - green, red and yellow (receiver)
Time delay before availability	< 3s
Short-circuit protection	Yes
Reverse Polarity Protection	Yes

Emission	Infrared (880nm)
Interference to external light	IEC EN 60947-5-2
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	20mm x 649mm x 35mm
Weight	1500g
Housing Material	Aluminium
Connections	M12 4pin + cable PVC 200mm ; M12 8pin + cable PVC 200mm
Active Head Material	PMMA
Operating temperature	-10°C...+ 55° C (without freeze)
Storage temperature	- 25°C...+ 60° C (without freeze)

Test/Approvals

Approvals	CE, cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2
Degree of protection	IP67

Accessories

Supplied Accessories	ST151 fixing kit
----------------------	------------------

## Generical Data

Dimensions

649x36x20

Operating Temperature

-10°C...+ 55° C (without freeze)


Mechanical Protection

IP67


# CONNECTIONS


Eletrical diagram

**CX2E0**

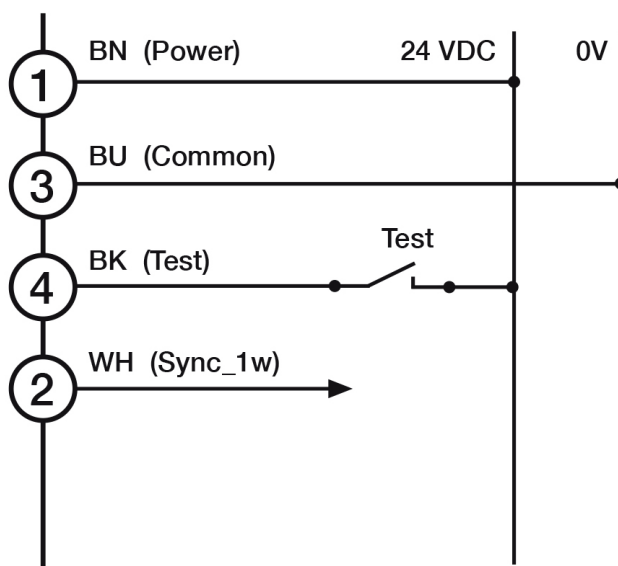



**CX2RB**

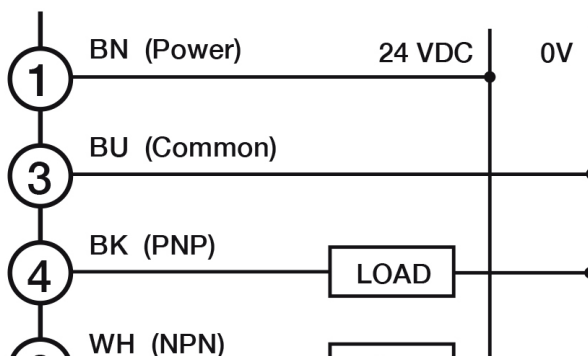

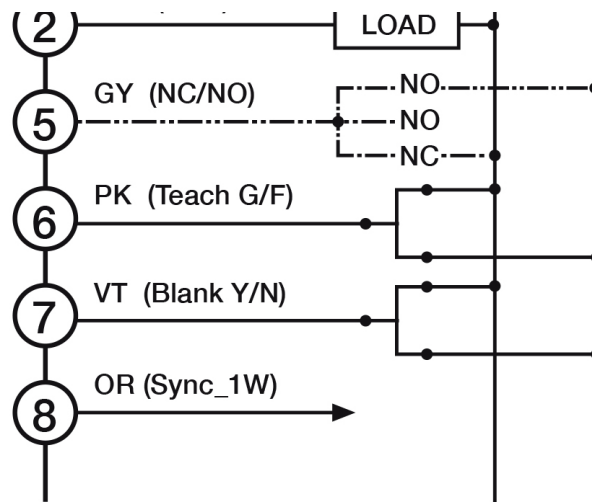


<b>G</b>	coarse calibration	<b>F</b>	fine calibration
<b>BK</b>	black	<b>BU</b>	blue
<b>BN</b>	brown	<b>GY</b>	gray
<b>RD</b>	red	<b>WH</b>	white
<b>PK</b>	pink	<b>VT</b>	violet
<b>OR</b>	orange		

Connector

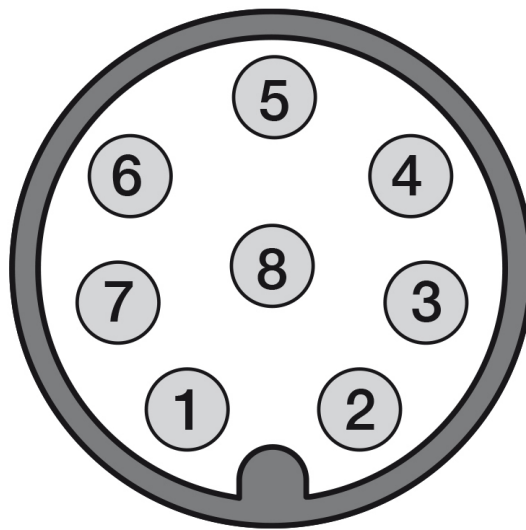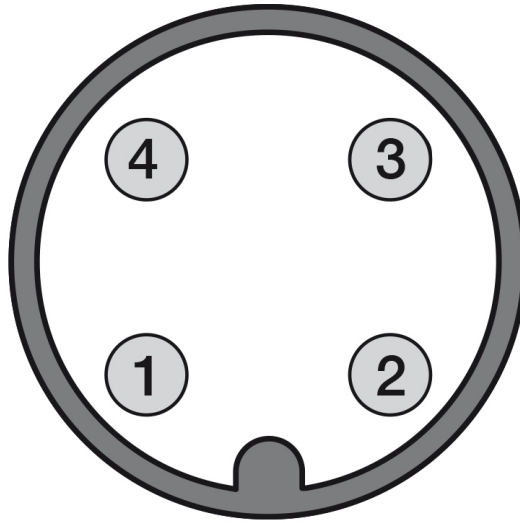

## OTHERS

### Dimensions



$$H \text{ (barrier height)} = h \text{ (controlled height)} + 9 \text{ mm}$$

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
[info@datasensing.com](mailto:info@datasensing.com)

**date of  
printing**  
05/12/2025  
01:54:11