



FM

FMM6/CP-3H

Ind.M18,PNP-NC,M12 Plug,Sch-LD

M5 - M8 - M12 - M18 - M30 INDUCTIVE SENSORS WITH FULL METAL HOUSING

OVERVIEW



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	3mm
Operanting distance	0...2,43mm
Standard target	12x12mm FE360
Correction Factor	copper: 0 / aluminium: 0 / brass: 0,1 / stainless steel: 0,53
Thermal drift of Sr	< 10%
Repeat Accuracy	< 5% (UB 24V Ta=23°C ±5°C)
Hysteresis	1 ... 20%

Application	
Description	M12 short flush mount
Functions	Proximity
Outputs	
Output type	PNP
Output Function	NC
Switching frequency	200Hz
Electrical data	
Operating Voltage	10...30Vdc
No-Load supply current	≤ 10mA
Load current	≤ 200mA
Leakage current	≤ 10μA
Output voltage drop	≤ 1,5V @200mA
Max ripple content	≤ 10%
LED indicators	Yellow LED output state
Time delay before availability	≤ 50ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes

Impulsive Overvoltage Protection	Yes
Protection against inductive loads	Yes

Mechanical data

Dimensions	M12 x 1 / L = 52mm
Mounting	Shielded
Material	AISI316L Stainless Steel
Housing material	AISI316L Stainless Steel
Weight	20g
Connections	M12 Plug
Active Head Material	stainless steel AISI316L
Tightening torque	10Nm
Operating temperature	-25°C...+70°C
0,25mm	0,50mm
Diameter/Dimension	M12

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP68, IP69K

IK05	
IK05	
80bar	
80bar	

Accessories


Supplied Accessories	2 nuts M12x1
----------------------	--------------

Generical Data


Dimensions	M12 x 1 / L = 52mm
Operating Temperature	-25°C...+70°C
Mechanical Protection	IP68 / IP69K

CONNECTIONS

Eletrical diagram

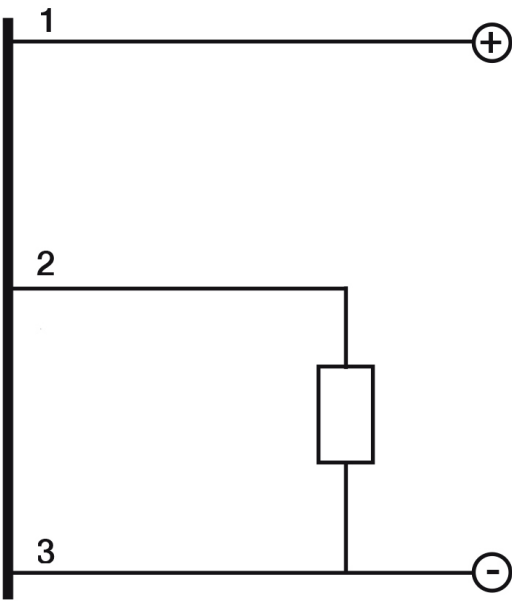

Connector

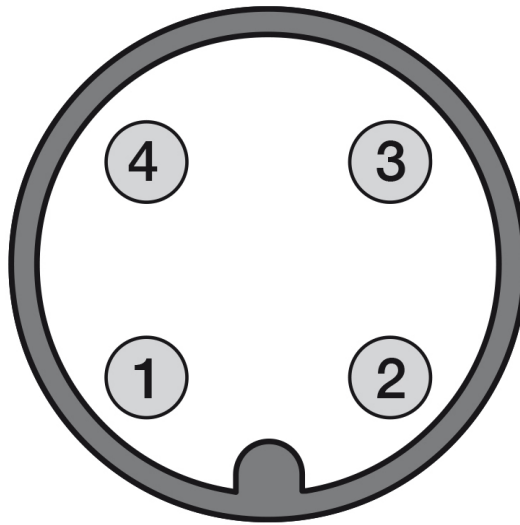


OTHERS


Dimensions

Image:

Response curves

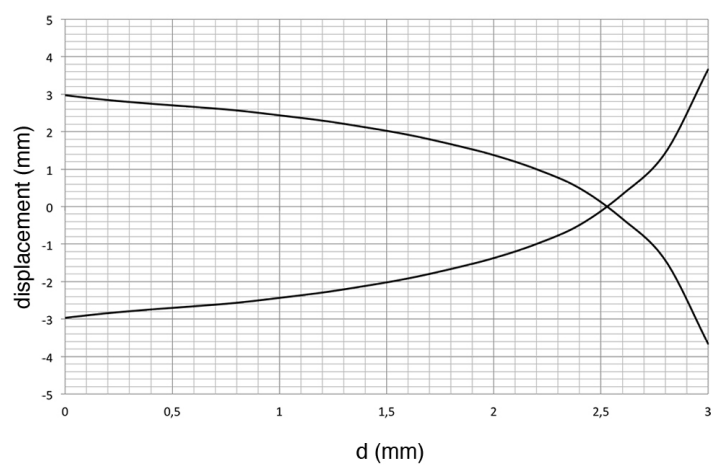

Installation

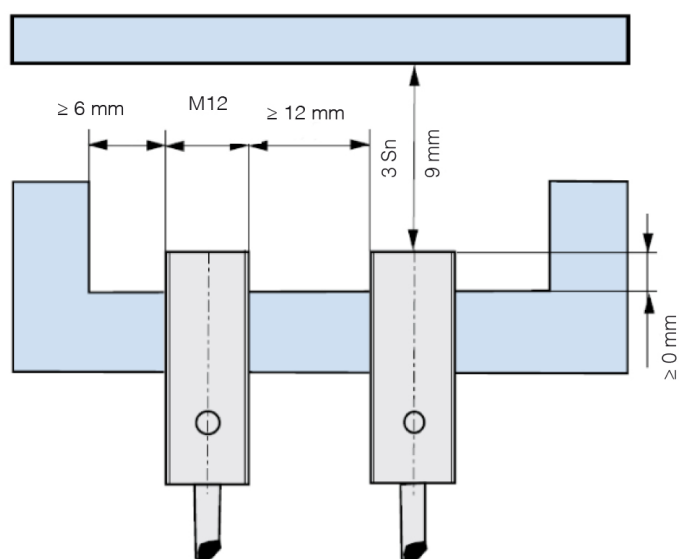

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
00:23:17