



# IL5

## IL5/AP-1AVF80

Ind.5x5,PNP-NO,Pigtail M8,Sch-STD  
5 X 5 MM CUBIC MINIATURIZED INDUCTIVE SENSORS

## OVERVIEW

- Complete range of cubic inductive sensors IL8 series: 5x5x25 mm
- IP67 protection degree



## TECHNICAL FEATURES

### Detection properties

Nominal sensing distance	0,8mm
Operanting distance	0...0,65mm
Standard target	5x5mm FE360
Correction Factor	copper: $0,37 \pm 10\%$ / aluminium: $0,27 \pm 10\%$ / brass: $0,40 \pm 10\%$ / stainless steel: $0,61 \pm 10\%$
Thermal drift of Sr	< 10%
Repeat Accuracy	< 5% (UB 24V Ta=23°C $\pm$ 5°C)

Hysteresis	1 ... 20%
------------	-----------

## Application

Description	5x5x25mm cubic flush mount
-------------	----------------------------

Functions	Proximity
-----------	-----------

## Outputs

Output type	PNP
-------------	-----

Output Function	NO
-----------------	----

Switching frequency	$\leq 7\text{kHz}$
---------------------	--------------------

## Electrical data

Operating Voltage	10...30Vdc
-------------------	------------

No-Load supply current	$\leq 10\text{mA}$
------------------------	--------------------

Load current	$\leq 100\text{mA}$
--------------	---------------------

Leakage current	$\leq 10\mu\text{A}$
-----------------	----------------------

Output voltage drop	$\leq 1,5\text{V @}100\text{mA}$
---------------------	----------------------------------

Max ripple content	$\leq 10\%$
--------------------	-------------

LED indicators	Blue LED output state
----------------	-----------------------

Time delay before availability	$\leq 50\text{ms}$
--------------------------------	--------------------

Short-circuit protection	Yes
--------------------------	-----

Reverse Polarity Protection	Yes
-----------------------------	-----

Impulsive Overvoltage Protection	Yes
----------------------------------	-----

Protection against inductive loads	Yes
------------------------------------	-----

#### Mechanical data

Mounting	Shielded
----------	----------

Dimensions	5 x 5 / L = 25mm
------------	------------------

Weight	15g
--------	-----

Housing Material	AISI303 Stainless Steel
------------------	-------------------------

Connections	200mm PUR Cable + M8 Plug
-------------	---------------------------

Active Head Material	PBT
----------------------	-----

Operating temperature	-25°C...+70°C
-----------------------	---------------

Material	AISI303 Stainless Steel
----------	-------------------------

Diameter/Dimension	5x5x25mm
--------------------	----------

#### Test/Approvals

Approvals	CE
-----------	----

EMC compatibility	IEC 60947-5-2
-------------------	---------------

Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
-----------------------	--

Degree of protection	IP67
----------------------	------

#### Accessories

---

Supplied Accessories

2 screws 1.6x0.35 L10mm

#### Generical Data

Dimensions

5 x 5 / L = 25mm

Operating Temperature


-25°C...+70°C

Mechanical Protection


IP67

## CONNECTIONS

Electrical diagram

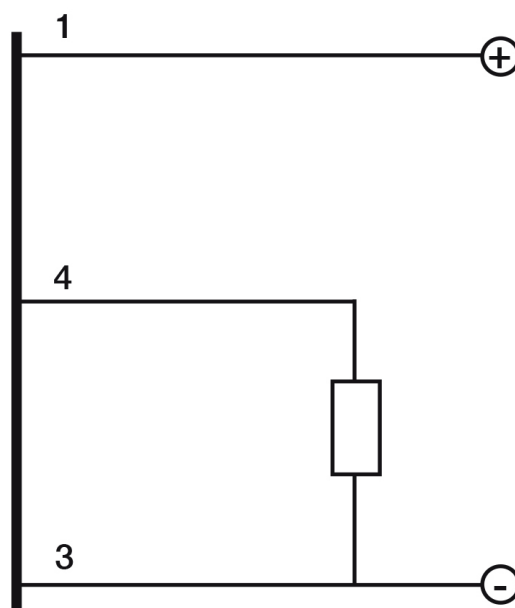


Connector



## OTHERS

### Dimensions

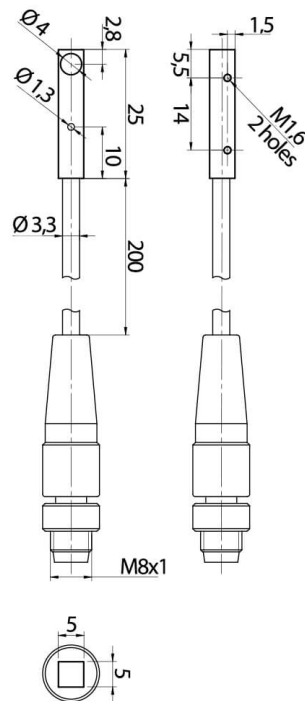

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)

**date of  
printing**  
24/04/2026  
16:16:12

Tel. 059 420411  
Fax 059 253973  
E-mail  
[info@datasensing.com](mailto:info@datasensing.com)