



HE

HEE/00-3F

Photo.M8,IR emiss.,M8 plug,Emitter
M8 MINIATURIZED THROUGH-BEAM SENSORS DC

OVERVIEW

- M8 through beam models with high switching frequency
- LED status indicator for all models
- Complete protection against electrical damages
- IP67 protection degree
- Stainless steel housing
- Supply voltage 10...30 Vdc
- Approvals: CE



TECHNICAL FEATURES

Detection properties

Nominal

Function Principle	Emitter
Emitter/Receiver	Emitter
Optic position	Axial
Outputs	
Output type	
Electrical data	
Operating Voltage	10...30VDC
No-Load supply current	≤45mA
Load current	
Leakage current	
Output voltage drop	
Max ripple content	≤10%
LED indicators	Yellow (powerON)
Time delay before availability	≤200ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LED Infrared (880nm)
Interference to external light	3.000 lux (incandescent lamp), 5.000 lux (sunlight)

Impulsive Overvoltage Protection	Yes
----------------------------------	-----

Mechanical data

Dimensions	M8x0,75/L=54mm
Housing material	Stainless Steel AISI 303
Weight	15g
Connections	M8 plug 3pin
Active Head Material	PMMA
Operating temperature	- 25°C...+ 50° C (without freeze)
Diameter/Dimension	M8


Test/Approvals

Approvals	CE
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67


Accessories

CONNECTIONS


Electrical diagram

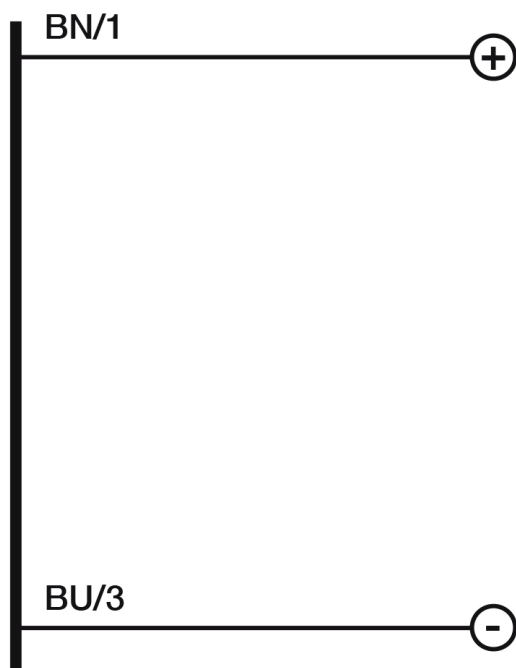


Connector



OTHERS

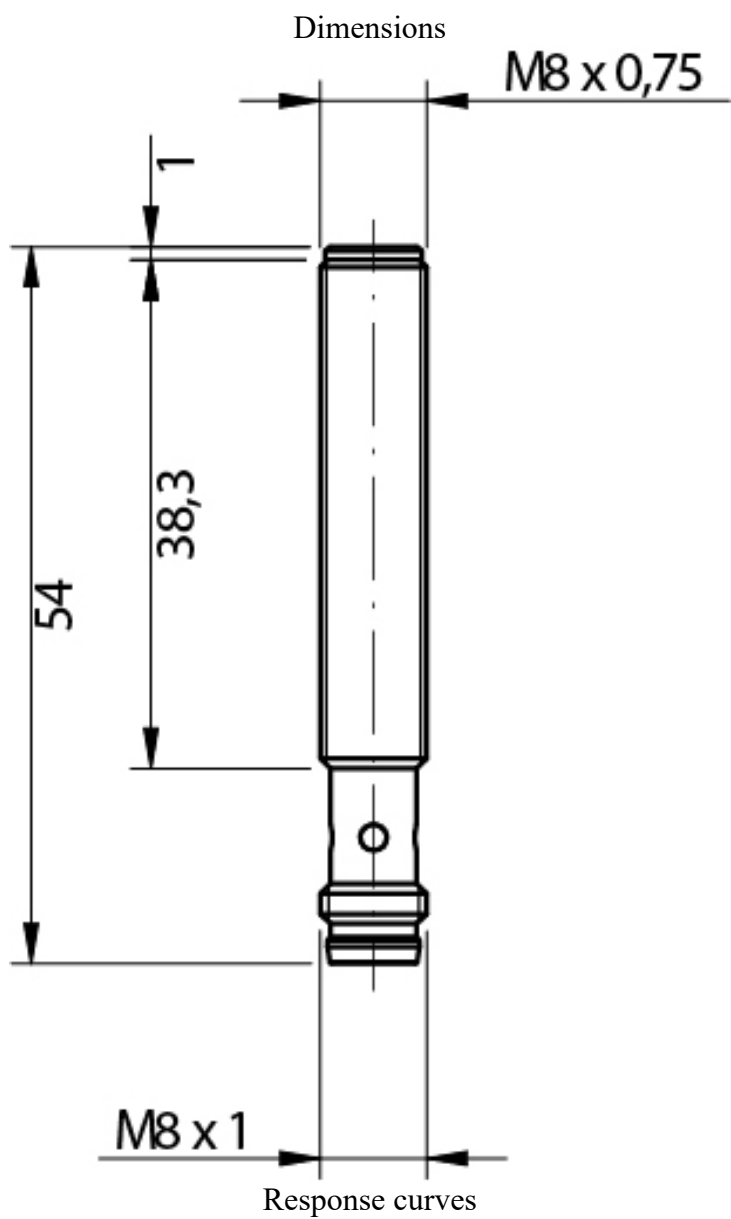

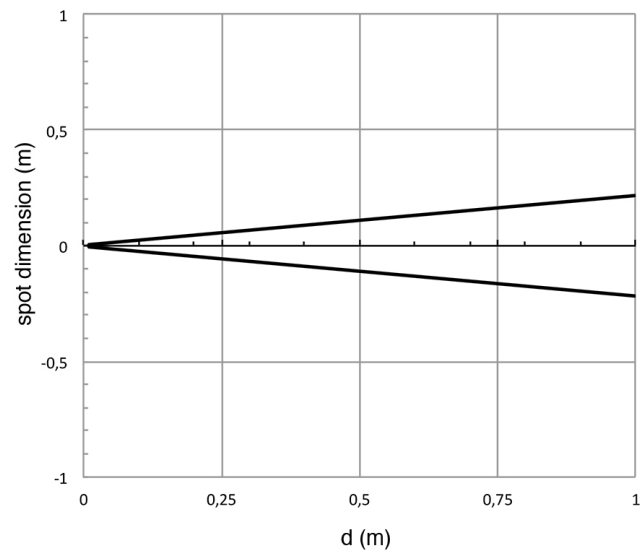

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 2