



SS-SP

SPU/00-0E

Photo.M18,Red emiss.,M12 plug,Emitter
M18 DC WITH LATERAL ADJUSTMENT

OVERVIEW

- Models with side sens. adjustment on axial and right angle optic
- LO/DO selectable output
- ATEX models, cat. 3, available on request
- LED status indicator for all versions
- Complete protection against electrical damages
- IP67 protection degree for all models
- Approvals: CE and cULus listed



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	3m (SSU), 8m (SSG)
--------------------------	--------------------

Thermal drift of Sr	$\leq 10\%$ Sr
---------------------	----------------

Application

Function Principle	Emitter
--------------------	---------

Emitter/Receiver	Emitter
------------------	---------

Optic position	Radial 90°
Outputs	
Output type	
Electrical data	
Operating Voltage	10...30VDC
No-Load supply current	≤ 25mA
Max ripple content	≤10%
LED indicators	Yellow (status output)
Time delay before availability	≤200ms
Reverse Polarity Protection	Yes
Emission	LED Red (660nm)
Impulsive Overvoltage Protection	Yes
Mechanical data	
Dimensions	M18 x 1 /L =75,7mm
Housing material	PBT / PC plug
Weight	30g
Connections	M12 plug
Active Head Material	PMMA

Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (Without freeze)
Diameter/Dimension	M18

Test/Approvals

Approvals	CE cULus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories


Supplied Accessories	nuts M18 x 1
----------------------	--------------

Generical Data


Dimensions	M18 x 1 /L =75,7mm
Operating Temperature	- 25°C...+ 70°C (Without freeze)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram

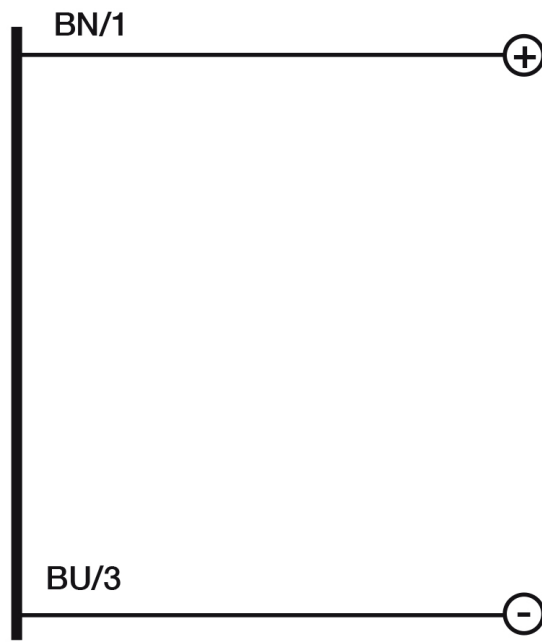


Connector

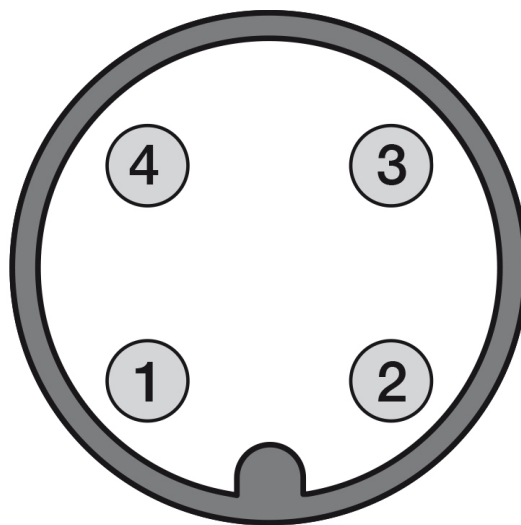


OTHERS

Dimensions

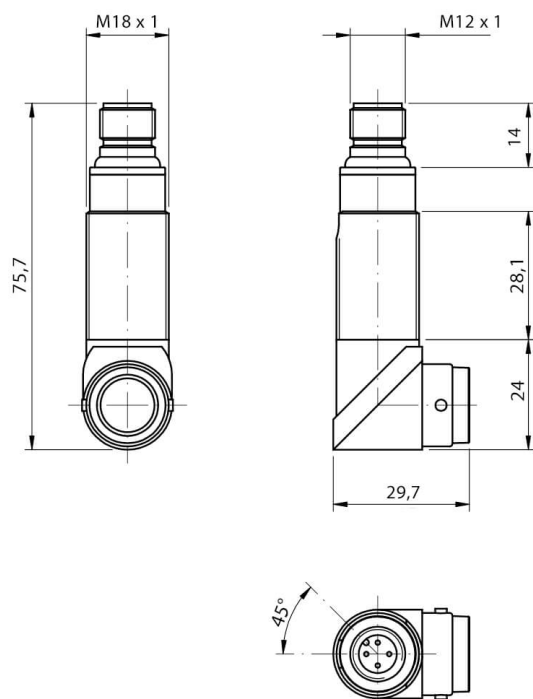

Response curves

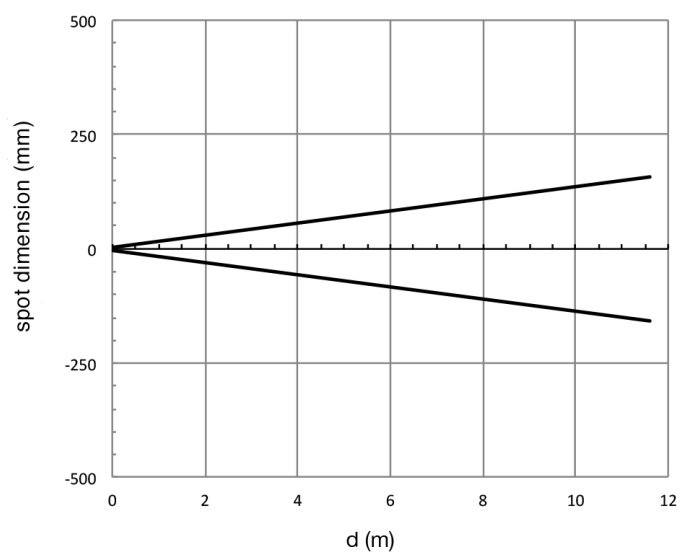

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
03:39:53