



FAL

FALN/BN-2E

**Photo.M18,Laser emiss.,NPN-NO+NC,M12
plug,Reflex**

M18 PHOTOELECTRIC SENSORS DC LASER EMISSION

OVERVIEW

- Complete range of M18 sensors with 10...30 Vdc power supply
- Axial and radial optic with flat surface
- Visible red laser emission models
- IP67 protection degree
- Metallic or plastic housing
- Sensitivity adjustment available for all models
- Total protection against any type of electric damages
- Approvals: CE and cULus listed



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	20m
Thermal drift of Sr	≤10% Sr
Repeat Accuracy	5%
Sensitivity adjustment	Teach-in

Application

Function Principle	Polarized
--------------------	-----------

Notes	On RL110 reflector ; 30m on RL201 , 5m on RL100D
-------	--

Optic position	Radial 90°
----------------	------------

Outputs

Output type	NPN NO+NC
-------------	-----------

Output Function	NO+NC
-----------------	-------

Switching frequency	800Hz
---------------------	-------

Response time	625μs
---------------	-------

Electrical data

Operating Voltage	10...30VDC
-------------------	------------

No-Load supply current	≤ 30mA
------------------------	--------

Load current	≤100mA
--------------	--------

Leakage current	≤10μA
-----------------	-------

Output voltage drop	≤2V@Iload=100mA
---------------------	-----------------

Max ripple content	≤10%
--------------------	------

LED indicators	Green power supply/yellow (LightON EG≥2)/yellow flashing (LightON 1<EG<2)
----------------	---

Time delay before availability	≤200ms
--------------------------------	--------

Short-circuit protection	Short circuit (autoreset), Overvoltage
--------------------------	--

Reverse Polarity Protection	Polarity inversal, Impulsive voltage
Emission	LASER Red (650nm) class1
Interference to external light	3000lux (incandescent lamp), 10000lux (sunlight)

Mechanical data

Dimensions	M18 x 1/L=92,7mm
Housing material	PBT / PC plug
Weight	30g
Connections	M12 plug
Active Head Material	Glass / PC
Tightening torque	1Nm
Operating temperature	- 15°C...+ 55° C (Without freeze)
Diameter/Dimension	M18

Test/Approvals

Approvals	CE cULus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67


Accessories

||
||
||


Supplied Accessories	nuts M18 x 1, screwdriver
Generical Data	
Dimensions	M18 x 1/L=92,7mm
Operating Temperature	- 15°C...+ 55°C (Without freeze)
Mechanical Protection	IP67

CONNECTIONS


Eletrical diagram

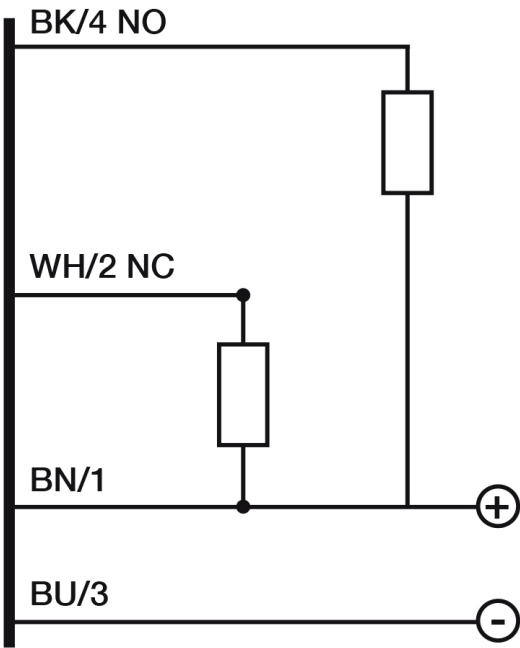



Connector

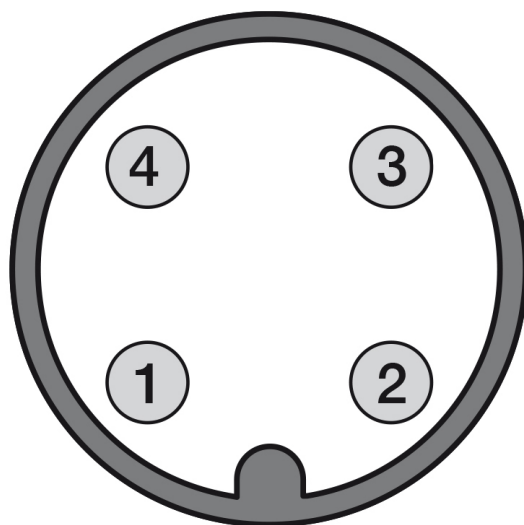

OTHERS

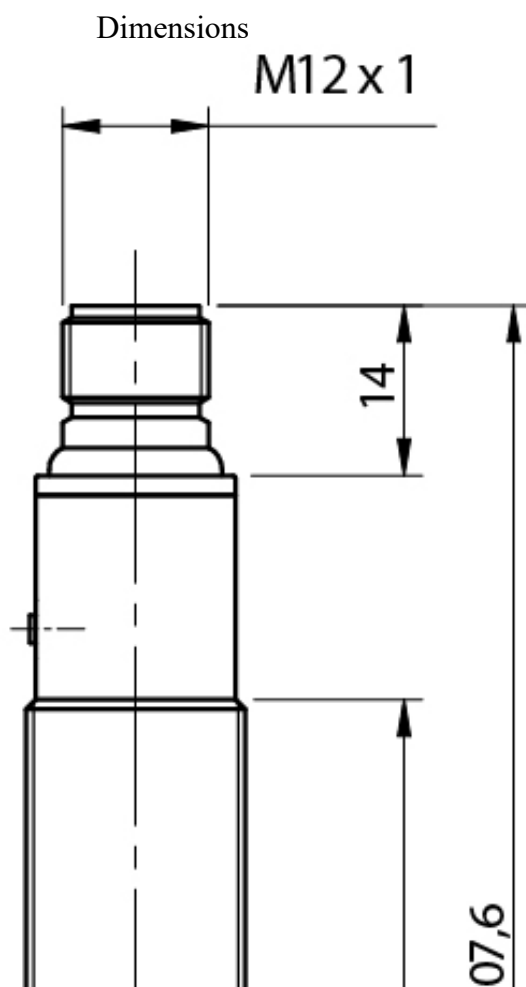

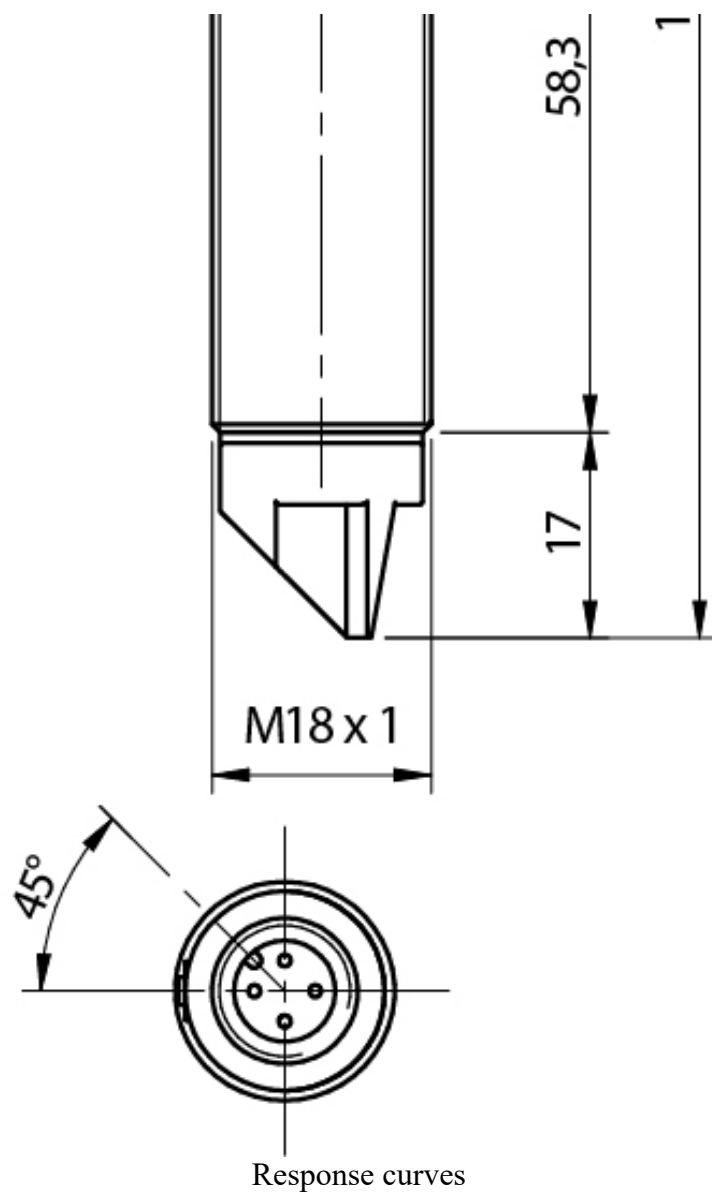

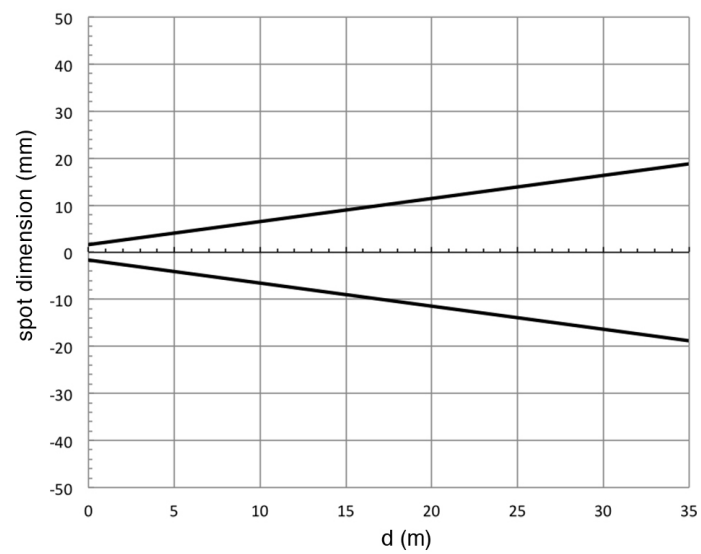

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
05:32:01