


S51

952701011

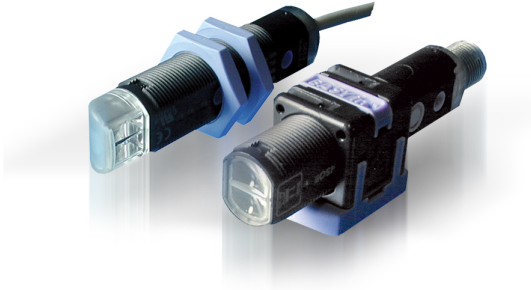

S51-PA-2-B01-PK

**EXTENDED RANGE OF STANDARD “ONE FOR ALL”
PHOTOELECTRIC TUBULAR M18 SENSORS**

OVERVIEW

- All optic functions and LASER models
- M18 flat plastic with universal mounting
- Available in M18 metal housing
- Axial or radial optics, cable or connector
- Standard 4-wire NO-NC NPN or PNP output

TECHNICAL FEATURES

Detection properties

Nominal sensing distance	3m
Sensitivity adjustment	Trimmer

Application

Function Principle	Polarized retroreflective
Description	Tubular M18 - axial optic
Functions	Polarized retroreflective

Outputs

Output type	PNP L/D selectable
-------------	--------------------

Output Function	L/D selectable
-----------------	----------------

Response time	1
---------------	---

Electrical data

Operating Voltage	10...30VDC
-------------------	------------

No-Load supply current	$\leq 35\text{mA}$
------------------------	--------------------

Load current	$\leq 100\text{mA}$
--------------	---------------------

Output voltage drop	$\leq 2\text{V}@I_{\text{load}}=100\text{mA}$
---------------------	---

Short-circuit protection	YES
--------------------------	-----

Reverse Polarity Protection	Yes
-----------------------------	-----

Emission	LED Red
----------	---------

Interference to external light	according to EN 60947-5-2 : 2020
--------------------------------	----------------------------------

Impulsive Overvoltage Protection	Yes
----------------------------------	-----

Insulation resistance	$>20\text{ M}\Omega$ 500 Vdc, between electronics and housing
-----------------------	---

Contact resistance	500 Vac 1 min., between electronics and housing
--------------------	---

Mechanical data

Dimensions	Ø18x67
------------	--------

Housing Material	Plastic PBT / PMMA
------------------	--------------------

Connections	2m cable
Active Head Material	PMMA
Storage temperature	- 25°C...+70°C
Material	
Diameter/Dimension	M18

Test/Approvals

Approvals	CE cULus
Shocks and vibrations	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)

Accessories

Supplied Accessories	nuts M18 x 1
----------------------	--------------

Generical Data

Dimensions	M18 x 1 /L=67
Operating Temperature	- 25°C...+ 55°C (Without freeze)
Mechanical Protection	IP67