



MV-MQ

MQ0/00-0E

Photo.M18,AC-NO/NC,M12 plug,BGS
M18 AC MULTIVOLTAGE OUTPUT PHOTOELECTRIC
SENSORS

OVERVIEW

- Wide range of models: diffuse, retro-reflective, polarized, through-beam
- Through-beam models with high sensing range
- Retro-reflective models with polarized light (with visible beam)
- M12 plug cable exit in axial or right angle shape
- Low leakage current and high output current
- IP67 protection degree
- Complete protection against electrical damage



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	50mm
Thermal drift of Sr	$\leq 10\%Sr$
Repeat Accuracy	5%
Sensitivity adjustment	No

Application

Function Principle	Blackground suppression
Notes	white target Kodak 90% 100 x 100mm
Optic position	Radial 90°
Outputs	
Output type	TRIAC L/D Selectable
Output Function	L/D Selectable
Switching frequency	25Hz
Response time	20ms
Electrical data	
Operating Voltage	20...253VAC/50-60Hz
No-Load supply current	≤ 40mARMS
Load current	5...300mARMS
Leakage current	≤1,5mARMS IL=250Vca
Output voltage drop	≤3V@Iload=300mARMS
Max ripple content	≤10%
LED indicators	Yellow (status output)
Time delay before availability	≤200ms
Emission	LED Infrared (880nm)

Interference to external light	3.000lux (incandescent lamp), 10.000lux (sunlight)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	M18x1/L=88,8mm
Housing material	PBT / PC plug
Weight	30g
Connections	M12 plug
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (without freeze)
Storage temperature	- 55°C...+80°C
Diameter/Dimension	M18

Test/Approvals

Approvals	CE cURus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories


Supplied Accessories	Nuts M18 x 1
----------------------	--------------

Generical Data


Dimensions	M18x1/L=88,8mm
Operating Temperature	- 25°C...+ 70°C (Without freeze)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram

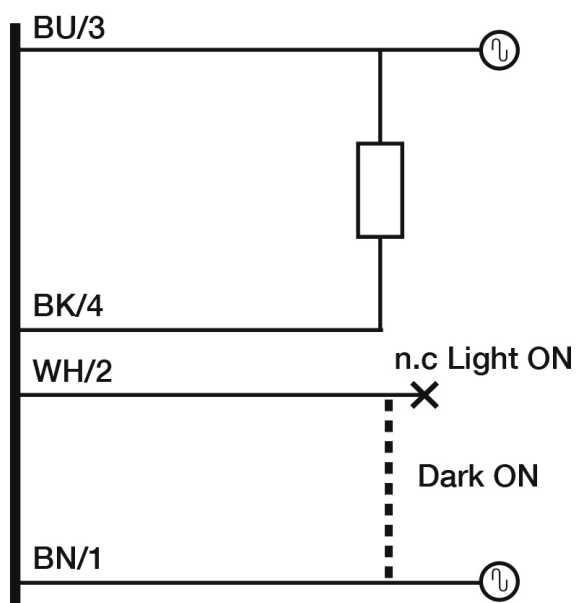


Connector

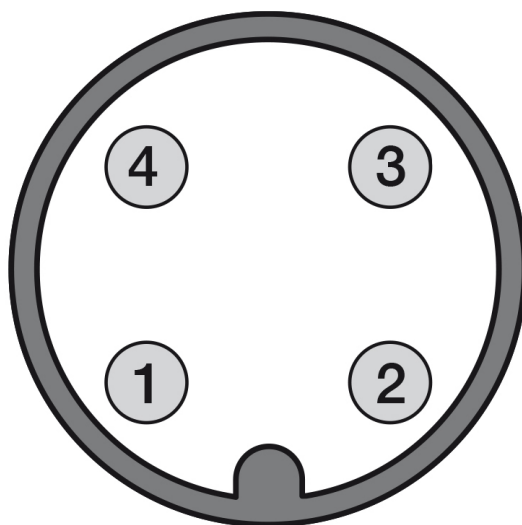


OTHERS

Dimensions

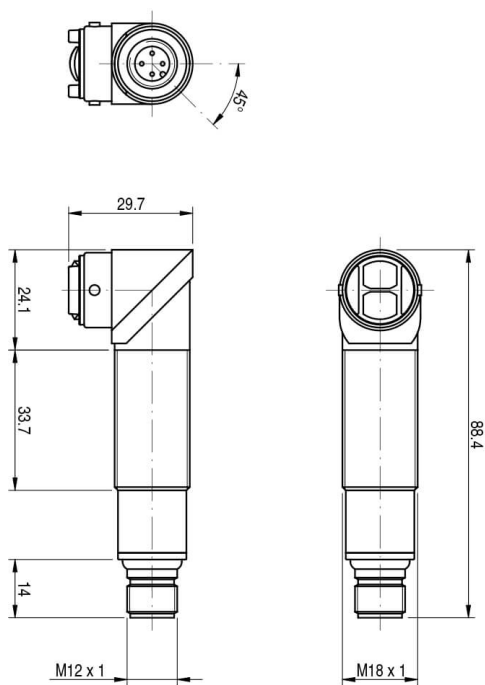

Response curves

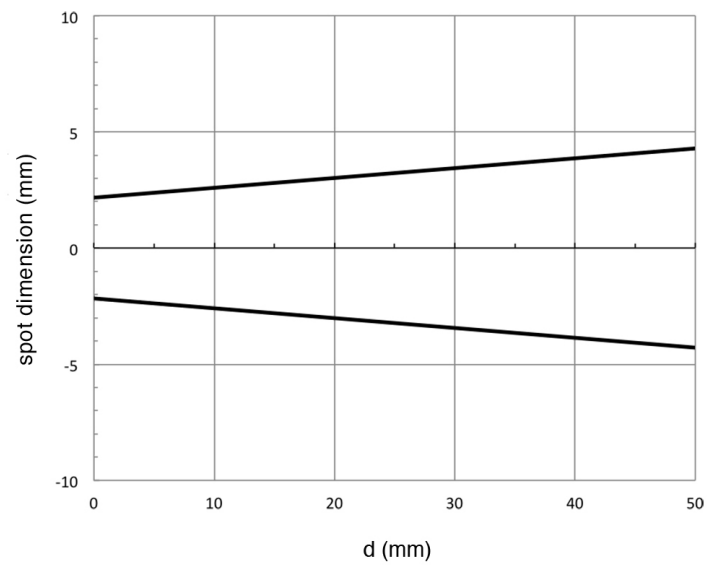

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
02:47:20