



S3N

95B010870

S3N-PR-5-T53-OZ TRANSP PNP M8
MINIATURE PHOTOELECTRIC SENSOR

OVERVIEW

- All models with visible and bright red emission
- LED and Laser emission models
- Multiple Background suppression functions
- Shiny and clear object detection
- Single, Double trimmer & Push Button models
- Diffuse proximity up to 100 cm
- Background suppression up to 800 mm (LED trimmer version)
- Polarized RRX 7 m (Red LED emission)
- Polarized RRX 12 m (Red Laser emission)
- Through-beam 20 m and Laser 30 m
- Connection with 2 m Cable or M8 connector
- Rugged IP67 Plastic miniature case
- M3 threaded holes on the front side with metal inserts
- State of the art IO-Link connectivity with extended Smart Tasks



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	2m
--------------------------	----

Sensitivity adjustment	Push Button TEACH-IN
------------------------	----------------------

Minimum sensing distance (blind zone)	0mm
---------------------------------------	-----

Application

Function Principle	Polarized retroreflective for clear object
--------------------	--

Notes	On R7 reflector
-------	-----------------

Optic position	Radial 90°
----------------	------------

Functions	Polarized retroreflective for clear object
-----------	--

Outputs

Output type	IO-Link
-------------	---------

Output Function	IO-Link
-----------------	---------

Switching frequency	500Hz
---------------------	-------

Response time	1ms
---------------	-----

Electrical data

Operating Voltage	10...30VDC
-------------------	------------

No-Load supply current	≤ 35mA
------------------------	--------

Load current	≤100mA
--------------	--------

Leakage current	≤ 300 μA
-----------------	----------

Output voltage drop	≤2V@Iload=100mA
---------------------	-----------------

Max ripple content	≤10%
--------------------	------

LED indicators	yellow OUTPUT LED all models, green Power ON LED and user interface interaction during teach, blu LED IO-Link Activity
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LED Red (635nm)
Interference to external light	according to EN 60947-5-2 : 2020
Impulsive Overvoltage Protection	Yes
Insulation resistance	>20 MΩ 500 Vdc, between electronics and housing
Contact resistance	500 Vac 1 min., between electronics and housing
0,1μF @Vmax - 1μF @Vmin	Yes

Mechanical data

Housing Material	Plastic Polymer Fiber Glass reinforced
Connections	M8 plug 4pin
Active Head Material	PMMA
Storage temperature	- 25°C...+70°C
Plug connector material	Metal
shaft material	POM, PMMA
Diameter/Dimension	Cubic

Test/Approvals

--	--


Approvals	CE cULus IO-Link
EMC compatibility	EN 60947-5-2
Shocks and vibrations	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)

Generical Data

Dimensions	11x31x19 mm
Operating Temperature	-25°C ... 55°C
Mechanical Protection	IP67

CONNECTIONS

Electrical diagram

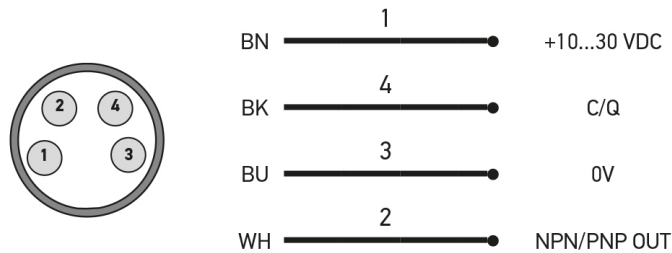

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
05/04/2026
17:22:45

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com