



Q50

Q50IS/B0-0A

Photo.50x50,NPN/PNP-NO+NC,Cable,BGS
COMPACT CUBIC 50 X 50 MM UNIVERSAL
PHOTOELECTRIC SENSOR

OVERVIEW

- Universal photoelectric sensor, excellent performances and high versatility due to the wide choice of different versions available
- Cable output or revolving connector, NPN/PNP outputs for Vdc models or SPDT relay output for multi -voltage Vdc / Vac models
- Complementary outputs NO + NC available on the Vdc models or selectable output NO/NC available on the multi-voltage Vdc/Vac models
- Totally protected against electrical damages
- Wide choice of optical functions available: Diffuse: 2 m; background suppression: 500 mm; polarized: 6m; through beam: 20 m. Dual multifunction output state LEDs

TECHNICAL FEATURES

Detection properties

Nominal sensing distance	500mm
--------------------------	-------

Sensitivity adjustment	Trimmer
------------------------	---------

Minimum sensing distance (blind zone)	120mm
---------------------------------------	-------

Application

Function Principle	Blackground suppression
--------------------	-------------------------

Optic position	Axial
Outputs	
Output type	NPN/PNP Selectable NO+NC
Output Function	NO+NC
Switching frequency	500Hz
Response time	1ms
Electrical data	
Operating Voltage	10...30VDC
No-Load supply current	≤ 40mA
Load current	≤200mA
Output voltage drop	≤2,5V@Iload=200mA
Max ripple content	≤10%
LED indicators	Yellow (Output status), Green (stability, powerON)
Time delay before availability	≤200ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LED Infrared (850nm)
Mechanical data	

Dimensions	50X50mm
Material	PC/ABS
Housing material	PC/ABS
Weight	200g
Connections	2m PVC cable
Active Head Material	PMMA
Operating temperature	- 20°C...+ 60°C (UL omologation 0°C...60°C)
Diameter/Dimension	Cubic

Test/Approvals

EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-62
Degree of protection	IP67

Accessories



Supplied Accessories	Mounting bracket
----------------------	------------------

Generical Data

Dimensions	50x50x17mm
Operating Temperature	- 20°C...+ 60°C (Without freeze)
Mechanical Protection	IP67


CONNECTIONS

Electrical diagram

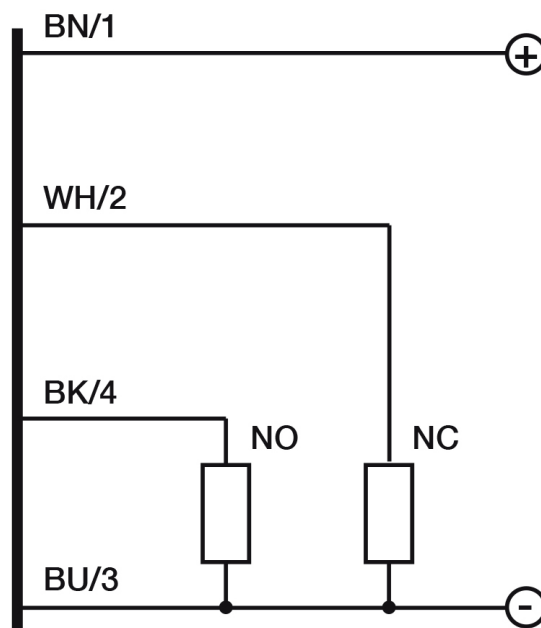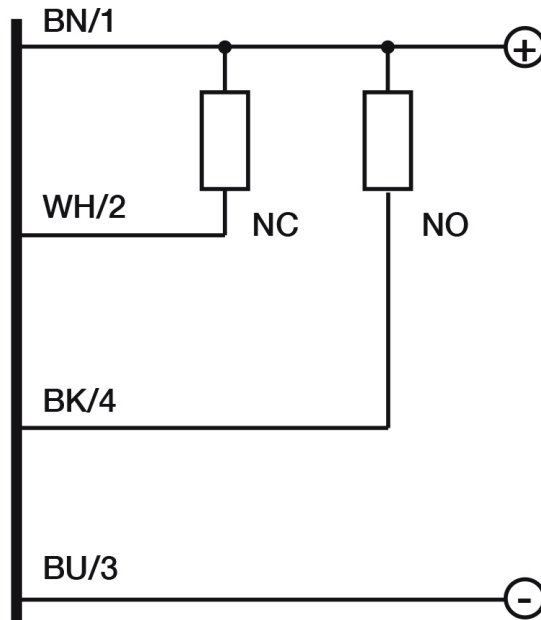


OTHERS

Dimensions

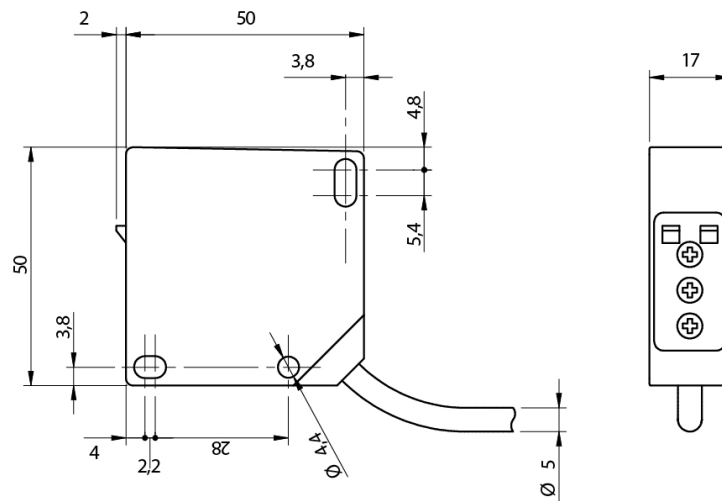

Response curves

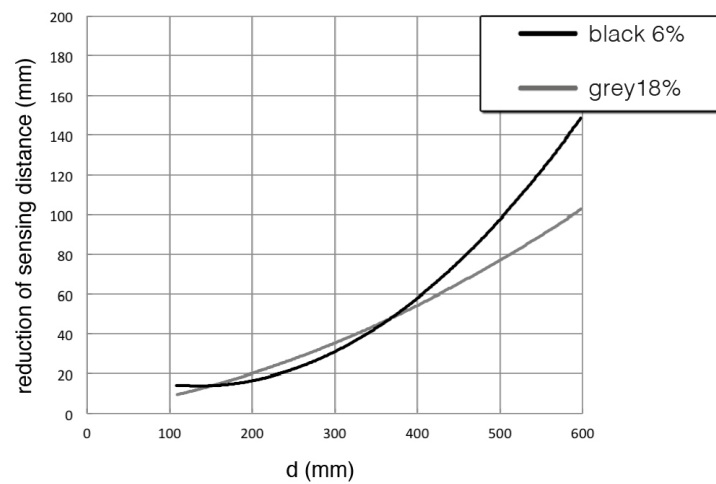

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

date of
printing
10/08/2026
02:57:28