



QF

QFID/BP-1F

Photo. Mini, PNP-NO+NC, M8 plug, Receiver
METALLIC CUBIC MINIATURIZED PHOTOELECTRIC SENSORS. FOR HARSH ENVIRONMENTS OR FOOD AND BEVERAGE APPLICATIONS.

OVERVIEW



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	15m
--------------------------	-----

Repeat Accuracy	5%
-----------------	----

Sensitivity adjustment	No
------------------------	----

Application

Function Principle	Diffuse reflection (medium distance, $\leq 600\text{mm}$)
--------------------	--

Emitter/Receiver	Receiver
------------------	----------

Optic position	Radial 90°
----------------	------------

Outputs	
Output type	PNP NO+NC
Output Function	NO+NC
Switching frequency	500Hz
Response time	1ms
Electrical data	
Operating Voltage	10...30VDC
No-Load supply current	≤ 20mA
Load current	≤100mA
Leakage current	≤100μA
Output voltage drop	≤2V@Iload=100mA
Max ripple content	≤10%
LED indicators	Yellow (status output), green (stability, powerON)
Time delay before availability	≤200ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LED Infrared (850nm)
Interference to external light	≤60000lux

Impulsive Overvoltage Protection	Yes
----------------------------------	-----

Mechanical data

Dimensions	31,4x21x11mm
Housing material	Stainless steel AISI 316L
Weight	65g
Connections	M8 plug 4pin
Active Head Material	PPSU
Operating temperature	- 25°C...+ 60° C (Without freeze)
Storage temperature	-40° ... +70°C
Diameter/Dimension	Cubic

Test/Approvals

Approvals	CE cULus ECOLAB
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP68, IP69K

Accessories

Supplied Accessories	Mouting bracket screwdriver
----------------------	-----------------------------


Generical Data

Dimensions	31,4x21x11mm
------------	--------------


Operating Temperature	- 15°C...+ 55°C (Without freeze)
Mechanical Protection	IP68, IP69K

CONNECTIONS

Eletrical diagram

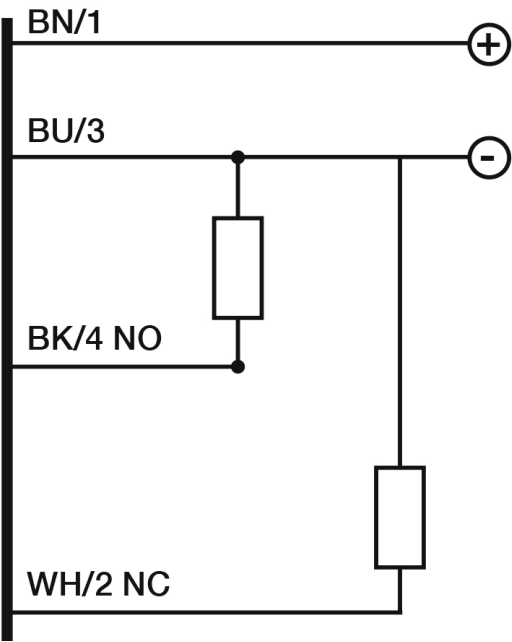


Connector




OTHERS

Dimensions

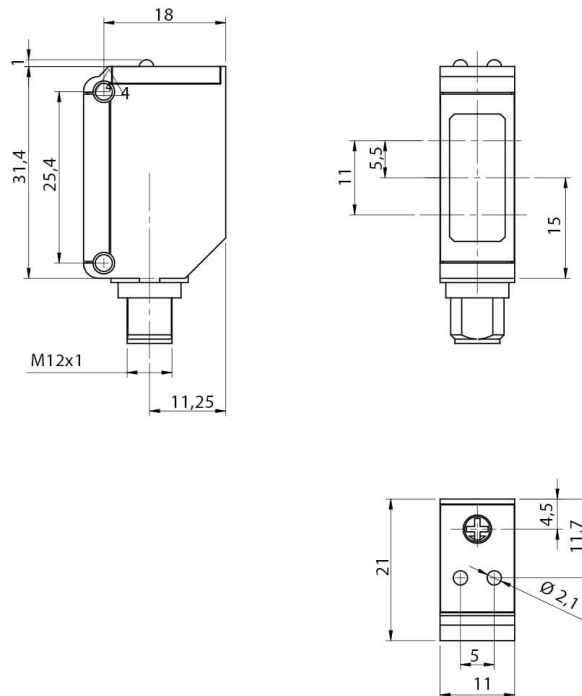

Response curves

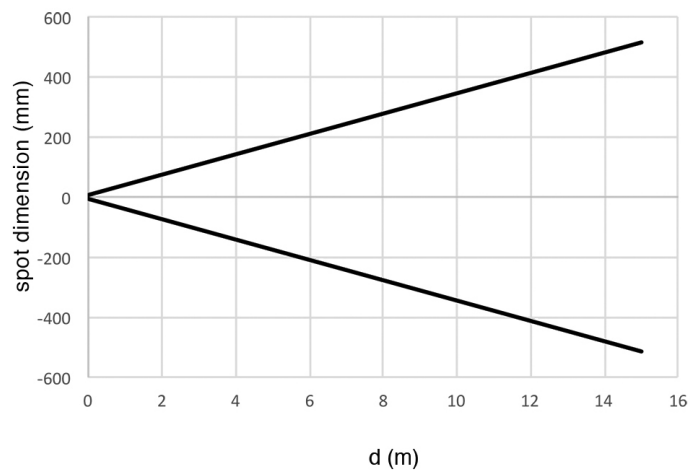

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
01:08:02