



RX

RX8/0T-1B37

**Photo.Maxi,NPN/PNP-NO/NC,M12
plug,Diff.**

**MAXI WITH STATIC OUTPUT DC OR WITH RELAY OUTPUT
AC/DC**

OVERVIEW

- Models: diffuse reflection, retro-reflective, polarized, through-beam and background suppression
- Series with high performances and wide possibilities of installation
- High sensing distance and very small dimensions
- Relay output or multifunctional DECOUT®
- Timer function delay on, delay off, one shot; trimmer for sensitivity adjustment
- Switch reducing the emission for fine detection in through-beam types
- LED alignment indicator with 360° visibility, 2 LED indicators (stable signal, output)
- M12 standard plug cable exit; axial and right angle brackets



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	4,5m
--------------------------	------

Thermal drift of Sr	10% Sr
---------------------	--------

Repeat Accuracy	5%
-----------------	----

Sensitivity adjustment	Trimmer
------------------------	---------

Application

Function Principle	Diffuse reflection (long distance, >600mm)
--------------------	--

Notes	white target Kodak 90% 400 x 400mm EG=1,5
-------	---

Optic position	Axial
----------------	-------

Outputs

Output type	Decout NPN/PNP Selectable Decout NO/NC Selectable
-------------	---

Output Function	Decout NO/NC Selectable
-----------------	-------------------------

Switching frequency	500Hz
---------------------	-------

Response time	1ms
---------------	-----

Electrical data

Operating Voltage	10...30VDC
-------------------	------------

No-Load supply current	$\leq 25\text{mA}$
------------------------	--------------------

Load current	$\leq 100\text{mA}$
--------------	---------------------

Leakage current	$\leq 10\mu\text{A}$
-----------------	----------------------

Output voltage drop	$\leq 1,2\text{V}@I_{\text{load}}=100\text{mA}$
---------------------	---

Max ripple content	$\leq 10\%$
--------------------	-------------

LED indicators	Red (output status) o (alineament), Green (stability)
----------------	---

Time delay before availability	$\leq 200\text{ms}$
--------------------------------	---------------------

Short-circuit protection	Yes
--------------------------	-----

Reverse Polarity Protection	Yes
Emission	LED Infrared (880nm)
Interference to external light	≥ 5000lux (incandescent lamp)

Mechanical data

Dimensions	26x86,6x61
Housing material	PC
Weight	90g
Connections	M12 plug
Active Head Material	PMMA
Operating temperature	- 25°C...+ 70°C (without freeze)
Diameter/Dimension	Cubic

Test/Approvals

Approvals	CE cULus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-28
Degree of protection	IP65

Accessories

Supplied Accessories	ST81 mounting bracket and screws
----------------------	----------------------------------

Generical Data

Dimensions

26x86,6x61

Operating Temperature

- 25°C...+ 70°C (Without freeze)


Mechanical Protection

IP65


CONNECTIONS

Eletrical diagram


NPN

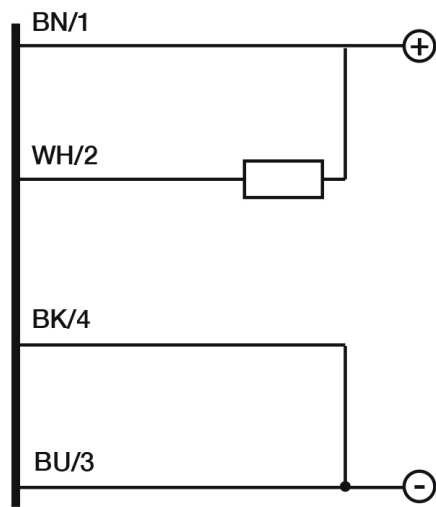

PNP

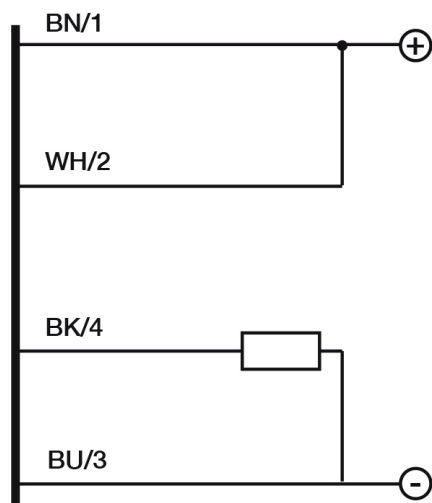


Connector

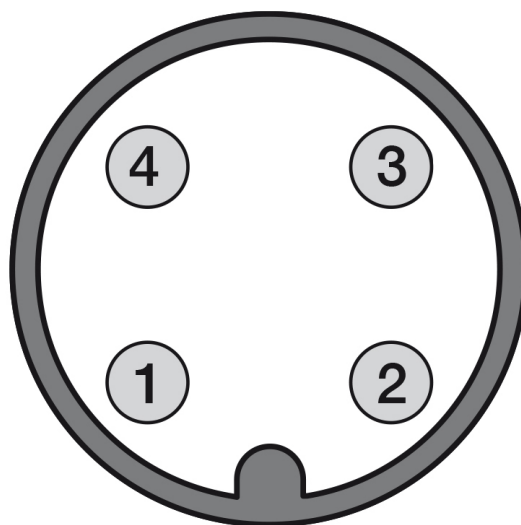


OTHERS

Dimensions

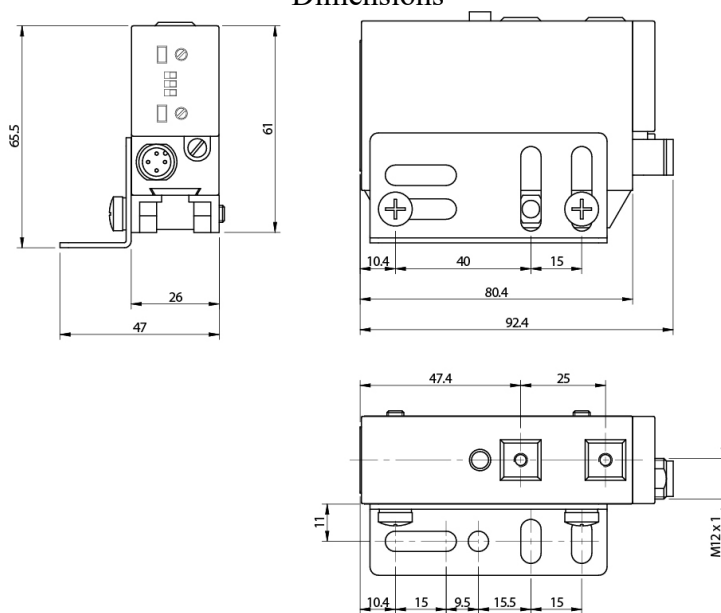

Response curves

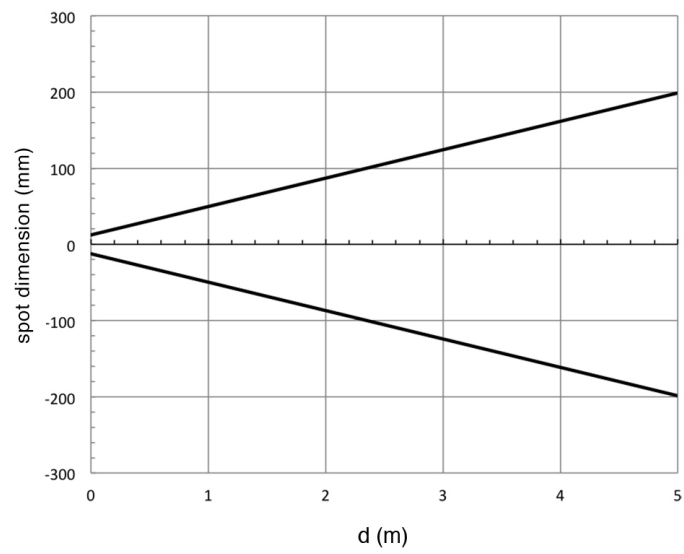

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
00:25:54