



TFM

TFM4/1X-0V

Photo,MINI TOF,PushPull,Pigtail M12,Dif.
TIME OF FLIGHT MINIATURIZED SENSOR

OVERVIEW

- Completely filled with resin
- 2 Digital Outputs (Lon)
- Switching Frequency from 10 Hz to 80 Hz
- Infrared Laser emission (class 1)
- Wide angle emission
- Output selectable : PNP or Pushpull
- Resolution from 1 to 3 mm
- IP67 protection degree and complete protection against electrical damages



TECHNICAL FEATURES

Detection properties

Nominal sensing distance

600mm

Spot dimension

Divergent (25°) wide angle

Resolution

3mm

Sensitivity adjustment

Trimmer

Hysteresis	± 6mm
------------	-------

Application

Function Principle	Time of Flight
Notes	(white 90%) 0 ... 350mm (grey 18%) 0 ... 300mm (black 6%)

Outputs

Output type	2 x Push-Pull LO
Output Function	LO
Switching frequency	≤ 10Hz
Response time	50ms

Electrical data

Operating Voltage	19,2 ... 28,8VDC
No-Load supply current	≤ 40mA
Load current	≤50mA
Leakage current	≤ 10µA
Output voltage drop	≤2V@Iload=50mA
Max ripple content	≤10%
LED indicators	Green (Run), Red (out of the operating range), Yellow (status)
Time delay before availability	≤200ms
Short-circuit protection	Yes

Reverse Polarity Protection	Yes
Emission	LASER Infrared
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	13 x 2x 31,2mm
Housing Material	PA66 + ABS
Connections	200mm PVC cable + M12 plug
Active Head Material	Glass
Operating temperature	-10°C ... + 50°C
Storage temperature	30°C ... +90°C
humidity	< 80% (without condensation)
Diameter/Dimension	Cubic

Test/Approvals

Approvals	CE
EMC compatibility	EN 60947-5-2
Degree of protection	IP67


Generical Data

Dimensions	13 x 2x 31,2mm
------------	----------------


Operating Temperature	- 10°C...+ 50°C (Without freeze)
Humidity	< 80% (without condensation)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram


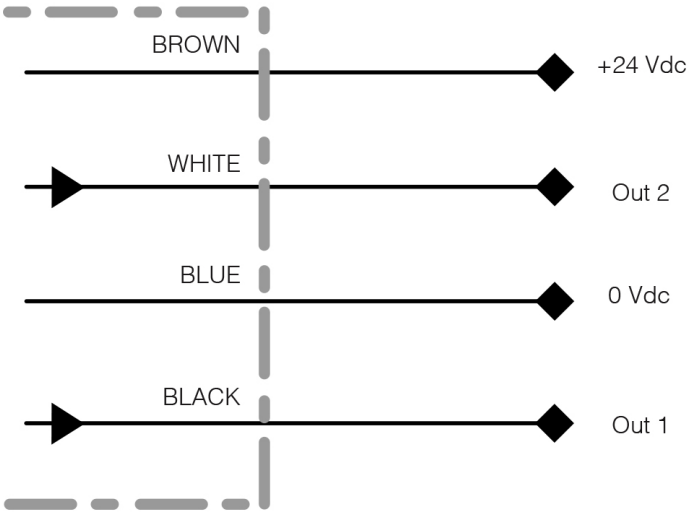


Connector

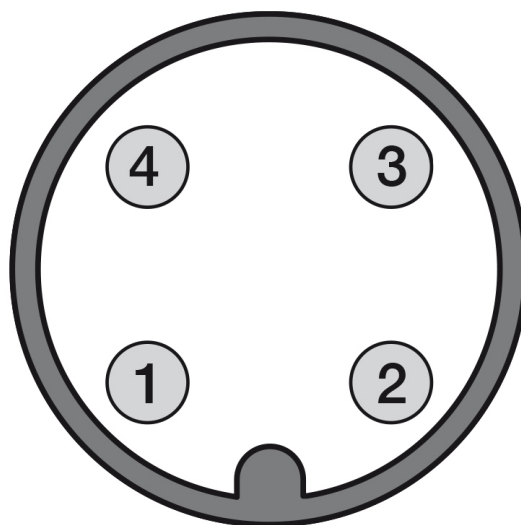


OTHERS

Dimensions

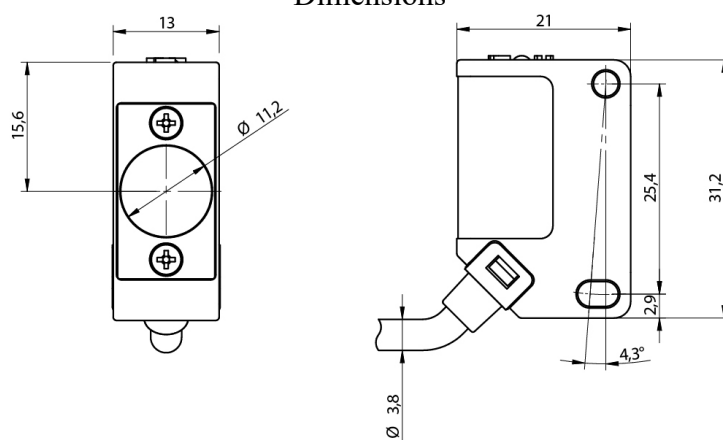

Response curves

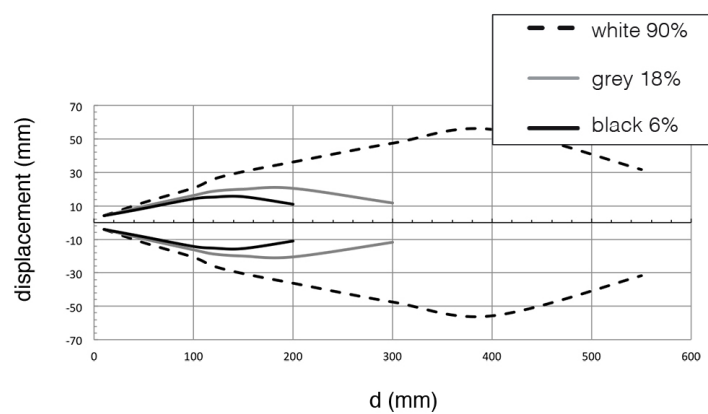

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
17/05/2025
15:01:31