



LTB

LTB/0P-0K

**Photo.M18,PNP-NO/NC,M12plug
90°,Contrast**

**SPECIAL PHOTOELECTRIC SENSORS M18 CONTRAST
SCANNER - DC**

OVERVIEW

- With white light emission
- Sensitivity adjustment
- Short response time (50 μ s)
- LO/DO selectable outputs
- P65 protection degree
- Complete protection against electrical damages
- Approvals: CE



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	12mm (with STF-12) 25mm (with SFT-25)
Thermal drift of Sr	$\leq 10\%$
Spot dimension	Ø 1mm (with STF-12) Ø 0,8mm (with SFT-25)

Application

Function Principle	Contrast mark detection
--------------------	-------------------------

Notes	white target Kodak 90% 100 x 100mm
-------	------------------------------------

Outputs

Output type	PNP L/D Selectable
Output Function	L/D Selectable
Switching frequency	10Khz
Response time	50 μ s

Electrical data

Operating Voltage	10...30VDC
No-Load supply current	$\leq$ 40mA
Load current	$\leq$ 100mA
Leakage current	$\leq$ 10 μ A
Output voltage drop	$\leq$ 1,2V@Iload=100mA
Max ripple content	$\leq$ 10%
LED indicators	Yellow (output status) Green(powerON)
Time delay before availability	$\leq$ 200ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LED white

Interference to external light	3000 lux (incandescent lamp) 10000 lux (sunlight)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	M18
Housing material	PBT
Connections	M12 plug
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	-5°C ... +55°C (without freeze)

Test/Approvals

Approvals	CE
EMC compatibility	EN 60947-5-2
Degree of protection	IP65

Accessories


Supplied Accessories	nuts M18 x 1
Accessories to be ordered separately	Focalizer STF-12 Focalizer STF-25

Generical Data


Dimensions	M18
Operating Temperature	- 5°C...+ 55° C (Without freeze)

CONNECTIONS

Electrical diagram

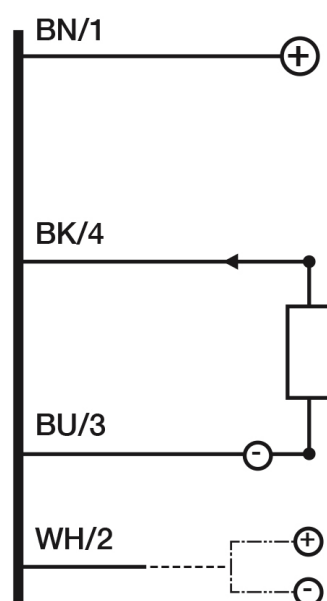

Connector

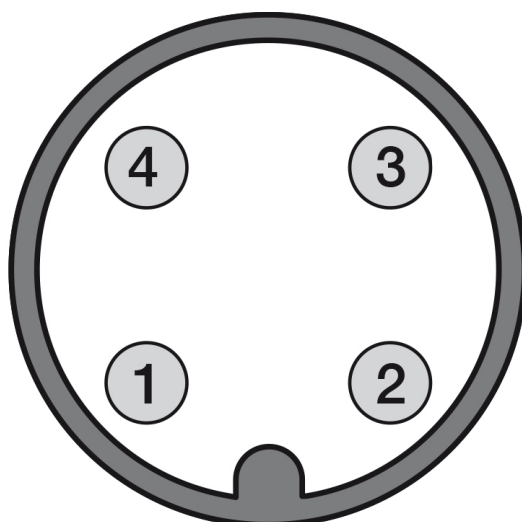

OTHERS

Dimensions

Image:

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**

31/07/2026
19:26:28