



SSF

SSF/0N-0A

Photo.M18,NPN-NO/NC,Cable,Fiber ampli
M18 PHOTOELECTRIC SENSORS FOR OPTICAL FIBRES

OVERVIEW

- Models with sensitivity adjustment by teach-in button
- With range of optical fibres are available
- LED status indicator for all versions
- Complete protection against electrical damages
- Approvals: CE and cULus listed



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	Depending on optical fibres used
--------------------------	----------------------------------

Thermal drift of Sr	10 % Sr
---------------------	---------

Repeat Accuracy	5%
-----------------	----

Sensitivity adjustment	Teach-in
------------------------	----------

Application

Function Principle	Optic fiber amplifier
Optic position	Axial
Outputs	
Output type	NPN L/D Selectable
Output Function	L/D Selectable
Switching frequency	800Hz
Response time	625μs
Electrical data	
Operating Voltage	10...30VDC
No-Load supply current	≤ 20mA
Load current	≤100mA
Leakage current	≤ 10 μA
Output voltage drop	≤2V@Iload=100mA
Max ripple content	≤10%
LED indicators	Yellow (output status)
Time delay before availability	≤200ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LED Red (660nm)

Interference to external light	3.000lux (incandescent lamp), 10.000lux (sunlight)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	M18 x 1 / L = 76mm
Housing material	PBT / PC cable exit
Weight	100 g
Connections	2m PVC cable
Active Head Material	Depending on optical fibres
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70°C (without freeze)
Diameter/Dimension	M18

Test/Approvals

Approvals	CE cULus
EMC compatibility	EN 60947-5-2
Degree of protection	IP67

Accessories

Supplied Accessories	nuts M18 x 1
----------------------	--------------


Generical Data

||
||
||

Dimensions	M18 x 1 / L = 76mm
Operating Temperature	- 25°C...+ 70°C (Without freeze)
Mechanical Protection	IP67


CONNECTIONS


Eletrical diagram

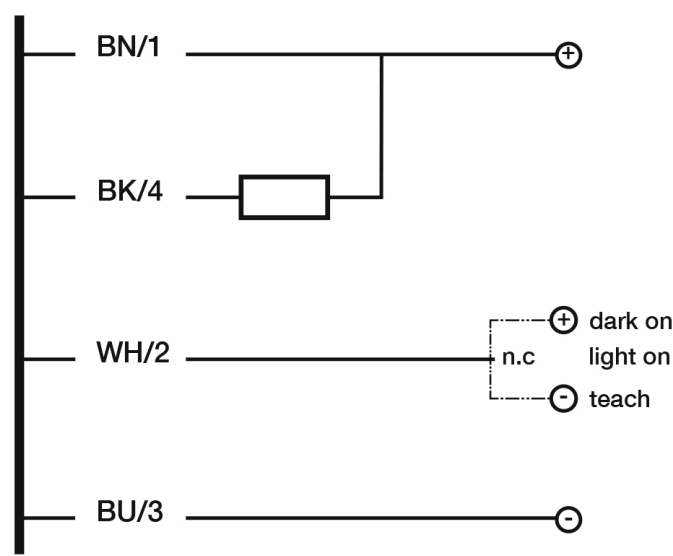


OTHERS

Dimensions

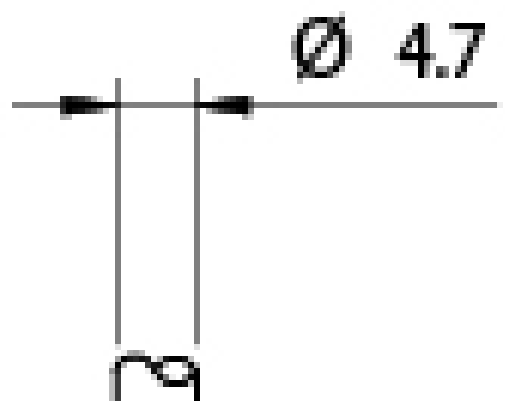

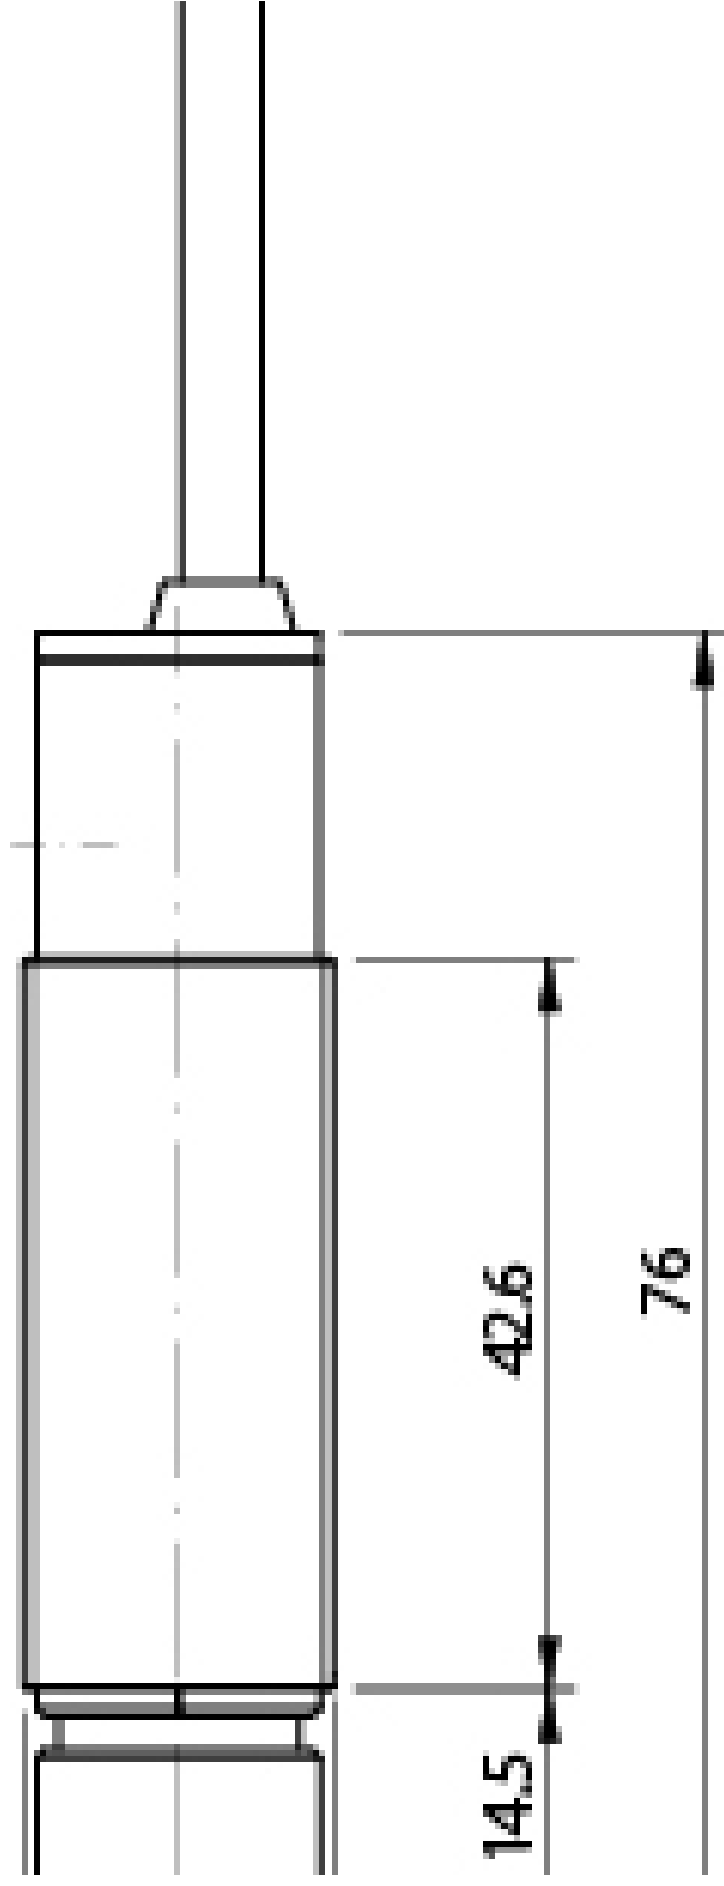

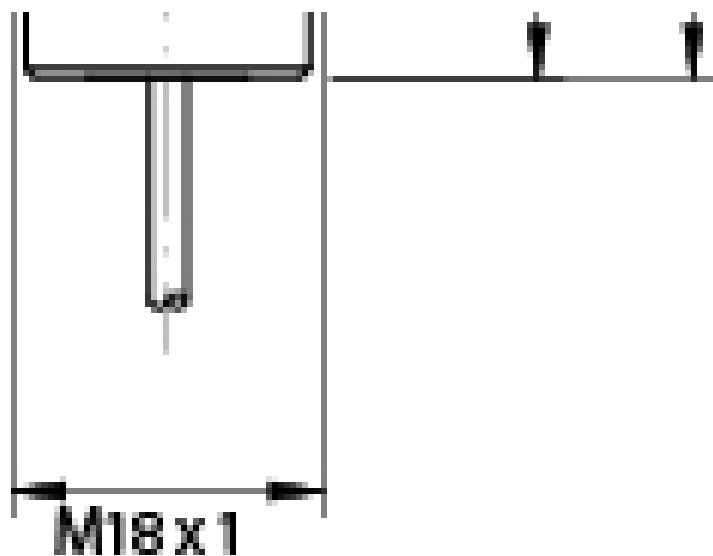

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
02:41:51