



CF

AF/ER2

Access,Opt.fibre,Focaliser CV/RB6,E+R
PLASTIC OPTICAL FIBRES

OVERVIEW

- Wide range of models: ultra slim for small object, long distances, spiral tube for handling
- Wide range of flexible fibre heads (with sleeve)
- Wide range of cutting fibre units
- P67 protection degree
- SSF – FS1 – FX3 – FX4 series connectable
- Approvals: CE

TECHNICAL FEATURES

Detection properties


Distance with SSF	3.000 mm
Distance with FS1	3.000 mm
Distance with FX3	8.000 mm
Distance with FX4	10.000 mm
Distance with F1R	410

Application

Function Principle	P/R
Fibre model	CV/RB6-**
Mechanical data	
Material	glass, nickel plated brass
Operating temperature	-40°C....+250°C
Ø optical fibre core	1
Head shape	Ø 8,5 mm
thread	M4
Test/Approvals	
Degree of protection	IP67 (EN60529)
Generical Data	
Operating Temperature	-40°C....+250°C
Mechanical Protection	IP67 (EN60529)

OTHERS

Dimensions

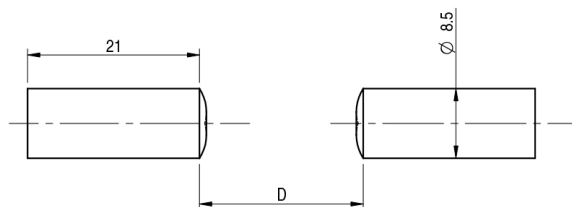

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
08/08/2026
10:06:20