


# CF

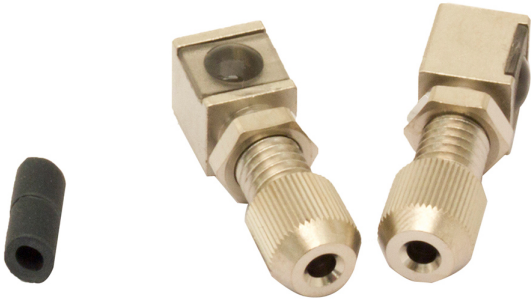

## AF/ER7

Access, Opt.fibre, Focal. AF/1F, E+R, 90°  
PLASTIC OPTICAL FIBRES

## OVERVIEW

- Wide range of models: ultra slim for small object, long distances, spiral tube for handling
- Wide range of flexible fibre heads (with sleeve)
- Wide range of cutting fibre units
- P67 protection degree
- SSF – FS1 – FX3 – FX4 series connectable
- Approvals: CE



## TECHNICAL FEATURES

Detection properties

Distance with SSF	1.000 mm
Distance with FS1	1.000 mm
Distance with FX3	6.000 mm
Distance with FX4	8.000 mm
Distance with FIR	4.500 mm

## Application

Function Principle	P/R
Fibre model	AF/1S

## Mechanical data

Material	glass, ETM, nickel plated brass
Operating temperature	-40°C....+70°C
Ø optical fibre core	1 mm
-	Yes
Ø optical fibre	2,2 mm (plastic)

## Test/Approvals



Degree of protection	IP67 (EN60529)
----------------------	----------------

## Generical Data

Operating Temperature	-40°C....+70°C
Mechanical Protection	IP67 (EN60529)

# OTHERS

## Dimensions

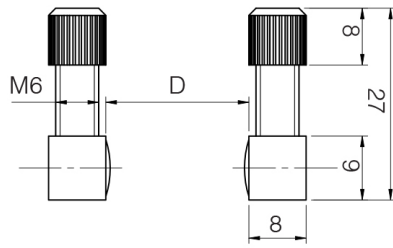

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
info@datasensing.com

**date of  
printing**  
13/06/2026  
13:36:26