



CF



AF/FC1

Access, Opt.fibre, Focaliser CV/CB1
PLASTIC OPTICAL FIBRES

OVERVIEW

- Wide range of models: ultra slim for small object, long distances, spiral tube for handling
- Wide range of flexible fibre heads (with sleeve)
- Wide range of cutting fibre units
- P67 protection degree
- SSF – FS1 – FX3 – FX4 series connectable
- Approvals: CE



TECHNICAL FEATURES

Detection properties

Distance with SSF	25 mm
Distance with FS1	25 mm
Distance with FX3	30 mm
Distance with FX4	30 mm

Application

Function Principle	Scanner
Fibre model	CV/CB1-**

Mechanical data

Material	glass, nickel plated brass
Operating temperature	-40°C....+125°C
Ø optical fibre core	1
Head shape	Ø 6,5 mm
thread	M4

Test/Approvals



Degree of protection	IP67 (EN60529)
----------------------	----------------

Generical Data

Operating Temperature	-40°C....+125°C
Mechanical Protection	IP67 (EN60529)

OTHERS

Dimensions

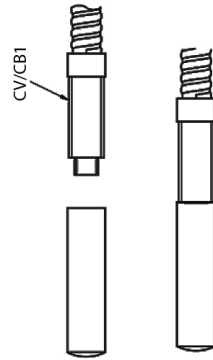

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
08/08/2026
10:06:39