



CV

CV/CB3-20

Optical fibre,Diff.,Axial,Glass,2m
HIGH TEMPERATURE GLASS OPTICAL FIBRES

OVERVIEW

- Models with flexible fibre heads (with sleeve)
- Wide range of accessories (AF serie)
- IP67 protection degree
- SSF - FS1 - FX3 - FX4 serie connectable
- Approvals: CE

TECHNICAL FEATURES

Detection properties

Distance with SSF	50 mm
Distance with FS1	50 mm
Distance with FX3	150 mm
Distance with FX4	150 mm

Application

Function Principle	Diffuse reflection

Description	Glass fibres up to 200°C
Optic position	Axial

Mechanical data

Operating temperature	-40°C....+200°C (posa fissa)
Fibre lengh (m)	2
Ø optical fibre core	1 mm
Head shape	M4 with sleeve
Optical fibre material	glass, ETM, inox
Head material	nickel-plated brass

Test/Approvals

Degree of protection	IP67
----------------------	------

Accessories


Accessories to be ordered separately	.
--------------------------------------	---

Generical Data

Operating Temperature	-40°C....+200°C (posa fissa)
Mechanical Protection	IP67

OTHERS

Dimensions

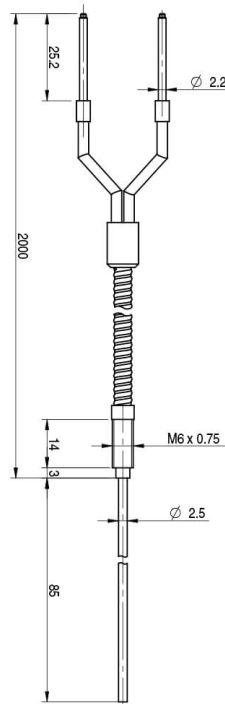

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
09:28:56