



CV

CV/RB6-20ME

Optical fibre,E+R 250°C,Axial,Glass,2m
HIGH TEMPERATURE GLASS OPTICAL FIBRES

OVERVIEW

- Models with flexible fibre heads (with sleeve)
- Wide range of accessories (AF serie)
- IP67 protection degree
- SSF - FS1 - FX3 - FX4 serie connectable
- Approvals: CE

TECHNICAL FEATURES

Detection properties

Distance with SSF	90 mm
Distance with FS1	90 mm
Distance with FX3	600 mm
Distance with FX4	900 mm
Distance with F1R	410 mm

Application

Function Principle	Emitter + Receiver
Description	Glass fibres up to 250°C
Optic position	Axial

Mechanical data

Operating temperature	-40°C....+250°C (posa fissa)
Fibre lengh (m)	2
Ø optical fibre core	1
Head shape	M4
Optical fibre material	glass, ETM, inox
Head material	nickel-plated brass

Test/Approvals

Degree of protection	IP67
----------------------	------

Accessories


Accessories to be ordered separately	vedi serie AF
--------------------------------------	---------------

Generical Data

Operating Temperature	-40°C....+250°C (posa fissa)
Mechanical Protection	IP67

OTHERS

Dimensions

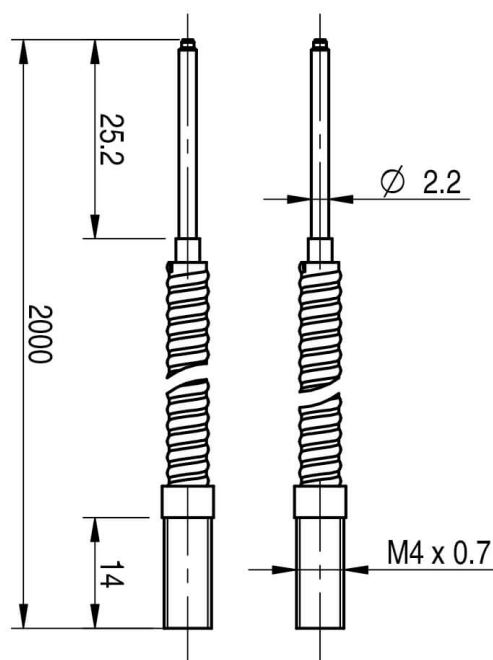

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
00:03:52