



CD

CD08/0A-020A5

Connect.M8-F,3 poles-2m,PUR,Axial

OVERVIEW



TECHNICAL FEATURES

Electrical data

Nominal current	4 A
Led	no
Wires	3
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 60 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,4 Nm
Operating temperature	-5°C...+80°C (flexible installation) -20°C...+80°C (fixed installation)

Fibre lengh (m)	2
Head type	Axial
Plug	M8
Outer diameter	Ø 3,75 mm ±0,2mm
Jacket material	PUR
Wire isolation	PVC
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-5°C...+80°C (flexible installation) -20°C...+80°C (fixed installation)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram


) BN/1 _____

) BU/3 _____

) BK/4 _____

OTHERS

Dimensions

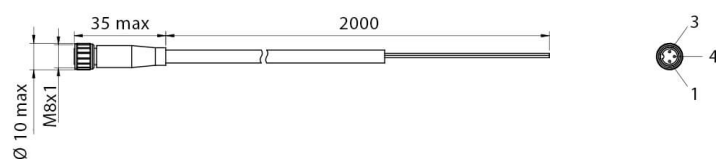

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
10/08/2026
01:04:34

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com