


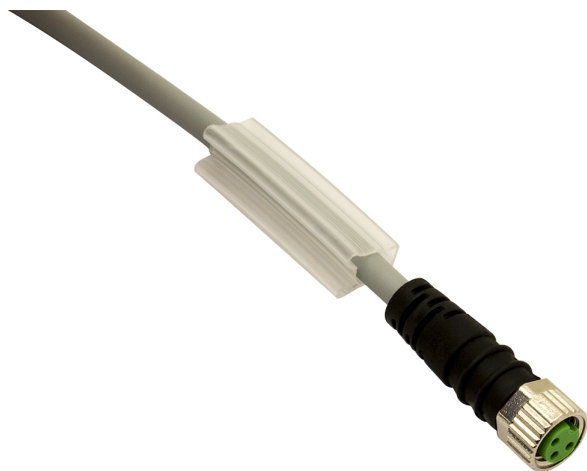

**CD**

**CD08/0A-150C5US**

**Connect.M8-F,3 poles-15m,PUR,90°**

## TECHNICAL FEATURES

### Electrical data

|                       |                 |
|-----------------------|-----------------|
| Nominal current       | 4 A             |
| Led                   | no              |
| Wires                 | 3               |
| Rated impulse voltage | 1,5 kV          |
| Nominal voltage       | Max. 60 V ac/dc |

### Mechanical data

|                       |                                                                            |
|-----------------------|----------------------------------------------------------------------------|
| Connections           | With open ended wires                                                      |
| Tightening torque     | 0,4 Nm                                                                     |
| Operating temperature | -25°C... +80°C (flexible installation)-25°C ... +80°C (fixed installation) |
| Fibre length (m)      | 15                                                                         |
| Head type             | 90°                                                                        |
| Plug                  | M8                                                                         |

|                    |                          |
|--------------------|--------------------------|
| Outer diameter     | Ø 4.1 mm ± 5%            |
| Jacket material    | PUR                      |
| Wire isolation     | PP                       |
| Conductors section | 0,25 mm2 (32 x 0,10 mm2) |
| Model              |                          |

Test/Approvals

|                      |        |
|----------------------|--------|
| Approvals            | cCSAus |
| Degree of protection | IP67   |

Generical Data

|                       |                                                                            |
|-----------------------|----------------------------------------------------------------------------|
| Operating Temperature | -25°C... +80°C (flexible installation)-25°C ... +80°C (fixed installation) |
| Mechanical Protection | IP67                                                                       |

# CONNECTIONS

Eletrical diagram


BN/1

BU/3

BK/4

## OTHERS

Dimensions

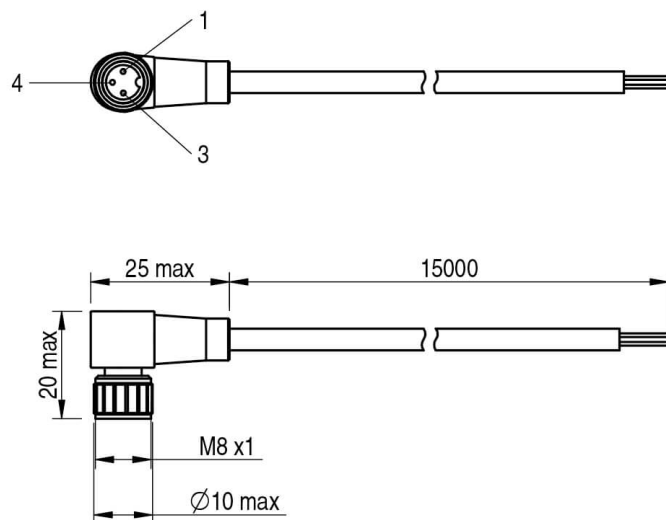

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)

**date of  
printing**  
09/08/2026  
23:29:39

Tel. 059 420411  
Fax 059 253973  
E-mail  
[info@datasensing.com](mailto:info@datasensing.com)