



CD

CD08/0B-050A5

Connect.M8-F,4 poles-5m,PUR,Axial

TECHNICAL FEATURES

Electrical data

Nominal current

4 A

Led

no

Wires

4

Rated impulse voltage

1,5 kV

Nominal voltage

Max. 60 V ac/dc

Mechanical data

Connections

With open ended wires

Tightening torque

0,4 Nm

Operating temperature

-5°C...+80°C (flexible installation) -30°C...+80°C (fixed installation)

Fibre lengh (m)

5

Head type	Axial
Plug	M8
Outer diameter	Ø 4,7 mm ± 0,2mm
Jacket material	PUR
Wire isolation	PVC
Conductors section	0,25 mm2(32 x 0,10 mm2)
Model	

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-5°C...+80°C (flexible installation) -30°C...+80°C (fixed installation)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram

BN/1


WH/2

BU/3

BK/4

OTHERS

Dimensions

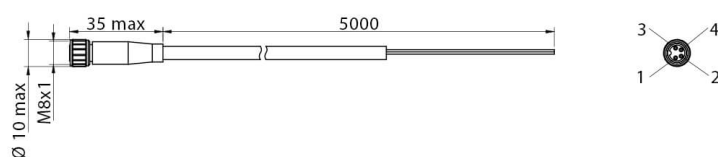

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
09/08/2026
23:29:51

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com