



CD

CD08/0B-050C5US

Connect.M8-F,4 poles-5m,PUR,90°

TECHNICAL FEATURES

Electrical data

Nominal current	4 A
Led	no
Wires	4
Rated impulse voltage	0,8 kV
Nominal voltage	Max. 30 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,4 Nm
Operating temperature	-10°C...+80°C (flexible installation) -25°C...+80°C (fixed installation)
Fibre lengh (m)	5
Head type	90°

Plug	M8
Outer diameter	Ø 4,5 mm ± 5%
Jacket material	PVC CEI 2022 II OR
Wire isolation	PVC
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	

Test/Approvals

Approvals	cCSAus
Degree of protection	IP67

Generical Data

Operating Temperature	-10°C...+80°C (flexible installation) -25°C...+80°C (fixed installation)
Mechanical Protection	IP67


CONNECTIONS

Eletrical diagram

BN/1
WH/2
BU/3
BK/4

OTHERS

Dimensions

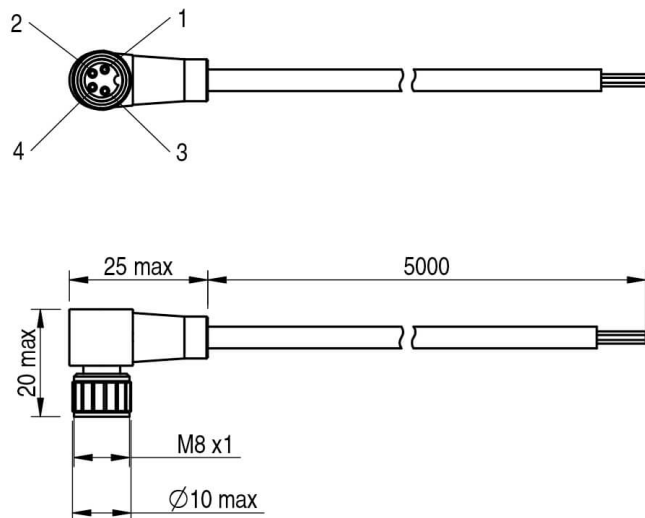

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
09/08/2026
23:30:01

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com