



CD

CD12F/LB-100C4

**Connect.M12-F,4
poles-5m-LED,PP/EPDM,90°**

TECHNICAL FEATURES

Electrical data

Nominal current	4 A
Led	3 (Supply - PNP output pin 4-2)
Wires	
Nominal voltage	Max . 24Vac/dc

Mechanical data

Jacket color	
Gasket material	
Nut material	
Conductors diameter including isolation	
Connections	Field attachable

Number of bending cycles	
Traversing path	
Tightening torque	
Traversing rate	
Operating temperature	
Torsion force	
Fibre lengh (m)	10
Head type	90°
Outer diameter	
Jacket material	PP-EPDM
Wire isolation	
Bending radius	
Conductors section	4
Acceleration	
Model	Female

Test/Approvals

Degree of protection	IP65 / IP67 / IP68 / IP69K
----------------------	----------------------------


Generical Data

||
||
||

Operating Temperature	-40°C...+105°C (fixed installation); -25°C...+105°C (flexible installation)
Mechanical Protection	IP65 / IP67 / IP68 / IP69K

OTHERS

Dimensions

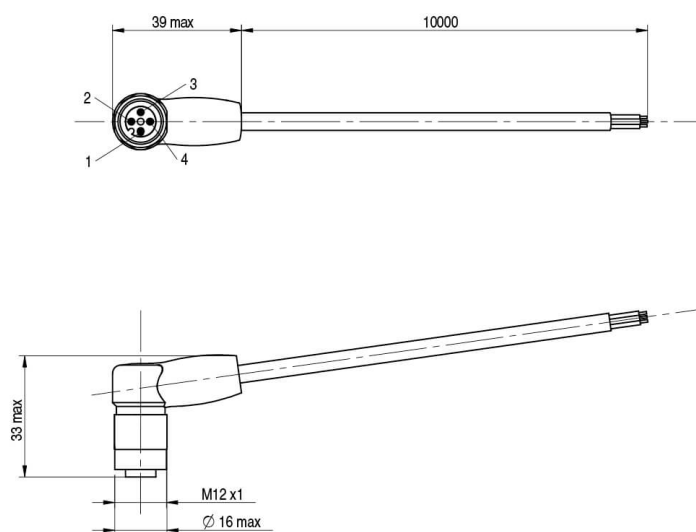

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
01:03:16