



CD

CD12M/0B-100C1HT

Connect.M12-F,4 poles-10m,PVC,90°

TECHNICAL FEATURES

Electrical data

Nominal current

4 A

Led

no

Wires

4

Rated impulse voltage

2,5 kV

Nominal voltage

Max. 250 V ac/dc

Mechanical data

Connections

With open ended wires

Tightening torque

0,6 Nm

Operating temperature

-25°C...+105°C (fixed installation)

Fibre length (m)

10

Head type

90°

Plug	M12
Outer diameter	Ø 4,5 mm ± 5%
Jacket material	PVC
Wire isolation	PVC
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-25°C...+105°C (fixed installation)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram

BN/1



WH/2

BU/3

BK/4

OTHERS

Dimensions

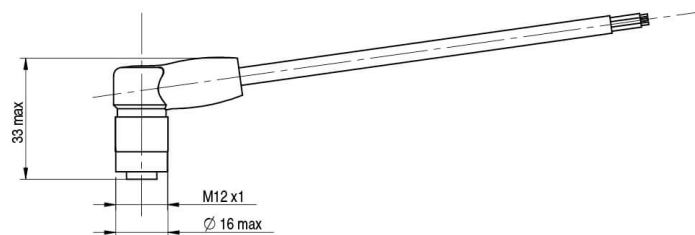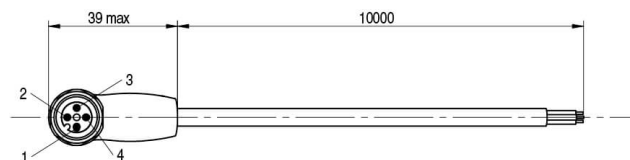

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
10/08/2026
03:29:33

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com