



CD

CD12M/0B-150C5US

Connect.M12-F,4 poles-15m,PUR,90°

TECHNICAL FEATURES

Electrical data

Nominal current	4 A
Led	no
Wires	4
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Fibre lengh (m)	15
Head type	90°

Plug	M12
Outer diameter	Ø 4,7 mm ± 5%
Jacket material	PUR
Wire isolation	PP
Bending radius	> 15 volte di diametro esterno (flexible installation) > 10 volte di diametro esterno (fixed installation)
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	

Test/Approvals

Approvals	cCSAus
Degree of protection	IP67

Generical Data

Operating Temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram

BN/1



WH/2

BU/3

BK/4

OTHERS

Dimensions

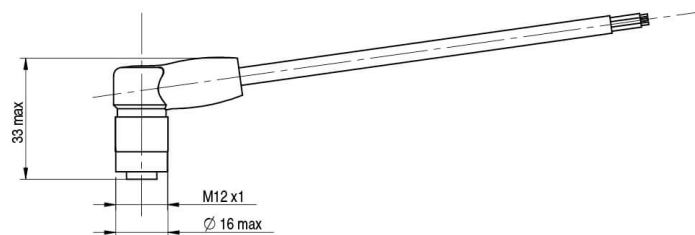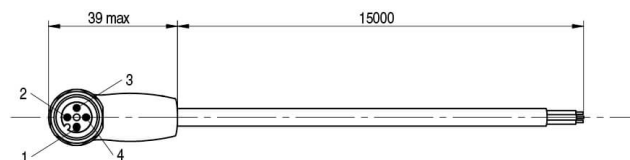

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
10/08/2026
07:30:56

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com