



CD

CD12M/0E-050A1

Connect.M12-F,8 poles-5m,PVC,Axial

TECHNICAL FEATURES

Application

Usable with

Safety light curtains: • LS2 STANDARD (TX) • LS4 STANDARD (TX) • LP4ER/0*-***L12 (RX) • LP4PF Safety sensors: • SH and TH • SH-IC and TH-IC

Installation

M12 8 poles axial female connector with PVC cable

Electrical data

Led

no

Wires

8

Mechanical data

Fibre length (m)

5

Head type

Axial

Plug

M12

Jacket material

PVC

Model

Female

Test/Approvals

Degree of protection

IP67

Generical Data

Mechanical Protection

IP67

CONNECTIONS

Eletrical diagram

) WH / 1 _____

) BN / 2 _____

) GN / 3 _____

) YE / 4 _____

) GY / 5 _____



) PK / 6 _____

) BU / 7 _____

) RD / 8 _____

OTHERS

Dimensions

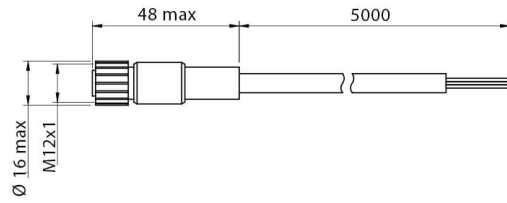

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
19/06/2026
10:29:09