



CD

CD12M/0E-250A1

Connect.M12-F,8 poles-5m,PVC,Axial

TECHNICAL FEATURES

Application

Usable with

Safety light curtains: • LS2 STANDARD (TX) • LS4 STANDARD (TX) • LP4ER/0*-***L12 (RX) • LP4PF Safety sensors: • SH and TH • SH-IC and TH-IC

Installation

M12 8 poles axial female connector with PVC cable

Electrical data

Led

no

Wires

8

Mechanical data

Fibre length (m)

25

Head type

Axial

Plug

M12


Jacket material

PVC

Model	Female
Test/Approvals	
Degree of protection	IP67
Generical Data	
Mechanical Protection	IP67


CONNECTIONS

Eletrical diagram

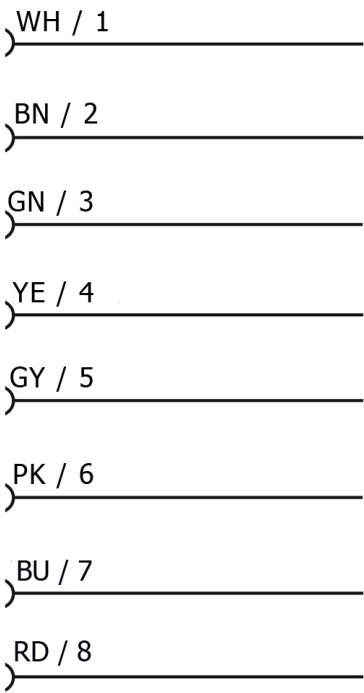

OTHERS

Dimensions

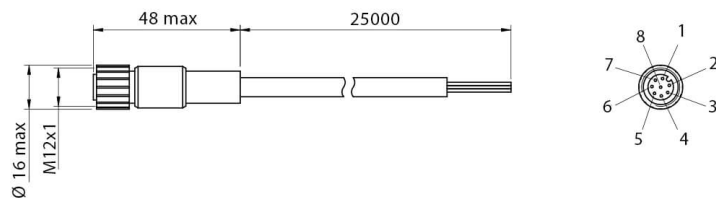

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
00:21:08