

# CD

# CD12M/0H-050A3

**Connect.M12-F,5 poles-5m,PVC,Axial**

# TECHNICAL FEATURES

Application

| | |
|---|---|
| Usable with | Safety light curtains: • LS2 BASE (TX and RX) • LS2 STANDARD (TX) • LS4 BASE (TX and RX) • LS4 STANDARD (TX) Safety sensors: • SH and TH • SH-IC and TH-IC |
| Installation | M12 5 poles axial female connector |

Electrical data

| | |
|---|---|
| Led | no |
| Wires | 5 |

Mechanical data

| | |
|---|---|
| Connections | With open ended wires |
| Fibre lengh (m) | 5 |
| Head type | Axial |
| Plug | M12 |

| | |
|---|---|
| Jacket material | PVC |
| Model | Female |

Test/Approvals


| | |
|---|---|
| Degree of protection | IP67 |

Generical Data

| | |
|---|---|
| Mechanical Protection | IP67 |


# CONNECTIONS

Eletrical diagram

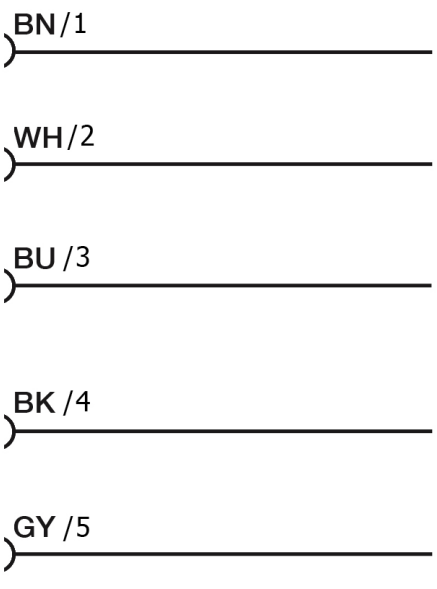


# OTHERS

Dimensions

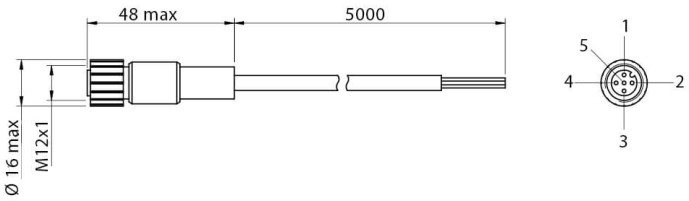


**Datasensing S.r.l.**
Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of printing**
24/11/2026
05:12:27