



# CD

## CD12M/0H-050A3

Connect.M12-F,5 poles-5m,PVC,Axial

## TECHNICAL FEATURES

### Application

Usable with

Safety light curtains: • LS2 BASE (TX and RX) • LS2 STANDARD (TX) • LS4 BASE (TX and RX) • LS4 STANDARD (TX) Safety sensors: • SH and TH • SH-IC and TH-IC

Installation

M12 5 poles axial female connector

### Electrical data

Led

no

Wires

5

### Mechanical data

Connections

With open ended wires

Fibre length (m)

5

Head type

Axial

Plug

M12

Jacket material

PVC

Model

Female

Test/Approvals

Degree of protection

IP67

Generical Data

Mechanical Protection

IP67

## CONNECTIONS

Electrical diagram

BN/1  
\_\_\_\_\_

WH/2  
\_\_\_\_\_


BU/3  
\_\_\_\_\_

BK/4  
\_\_\_\_\_

GY/5  
\_\_\_\_\_

## OTHERS

Dimensions

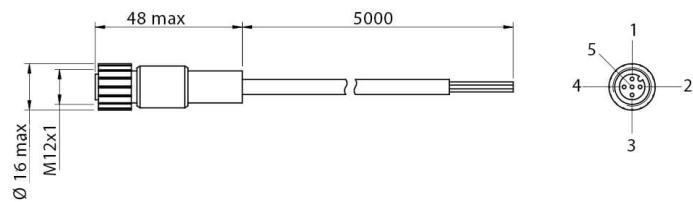

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
info@datasensing.com

**date of  
printing**  
15/06/2026  
09:55:29