

# CD

# CD12M/0H-050C5

**Connect.M12-F,5 poles-5m,PUR,90°**

# TECHNICAL FEATURES

Electrical data

| | |
|---|---|
| Nominal current | 4 A |
| Led | no |
| Wires | 5 |
| Nominal voltage | 60 V |

Mechanical data

| | |
|---|---|
| Connections | With open ended wires |
| Tightening torque | 0,6 Nm |
| Operating temperature | -5°C ÷ +70°C (flexible installation)-30°C ÷ +80°C (fixed installation) |
| Fibre lengh (m) | 5 |
| Head type | 90° |
| Plug | M12 |

| | |
|---|---|
| Outer diameter | Ø 4.5 mm ± 5% |
| Jacket material | TPU |
| Wire isolation | TPU |
| Conductors section | 0,25 mm2 (32 x 0,10 mm2) |
| Model | |

Test/Approvals

| | |
|---|---|
| Degree of protection | IP67 |

Generical Data

| | |
|---|---|
| Operating Temperature | -5°C ÷ +70°C (flexible installation)-30°C ÷ +80°C (fixed installation) |
| Mechanical Protection | IP67 |

# CONNECTIONS

Eletrical diagram

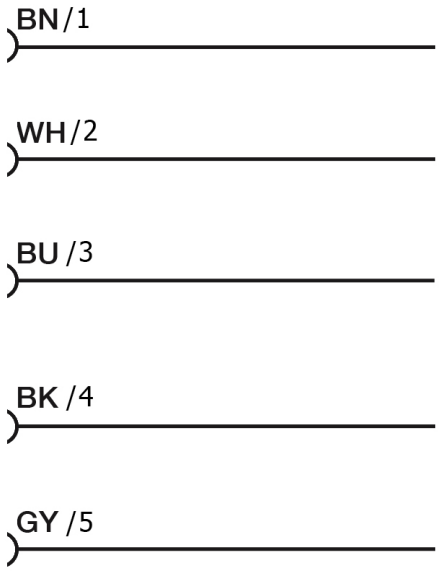


# OTHERS

Dimensions

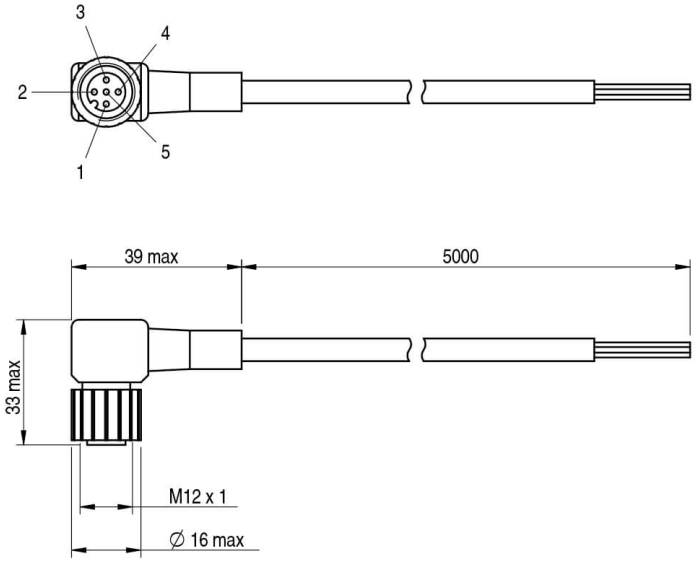


**Datasensing S.r.l.**
Strada S.Caterina, 235
41122 Modena (MO)

**date of printing**
24/11/2026
06:13:18

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com