



**CD**

**CD12M/0H-100C3**

**Connect.M12-F,5 poles-10m,PVC,90°**

**TECHNICAL FEATURES**

**Application**

|              |                                                                                                                                                            |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Usable with  | Safety light curtains: • LS2 BASE (TX and RX) • LS2 STANDARD (TX) • LS4 BASE (TX and RX) • LS4 STANDARD (TX) Safety sensors: • SH and TH • SH-IC and TH-IC |
| Installation | M12 5 poles axial female connector                                                                                                                         |

**Electrical data**

|       |    |
|-------|----|
| Led   | no |
| Wires | 5  |


**Mechanical data**

|                 |                       |
|-----------------|-----------------------|
| Connections     | With open ended wires |
| Fibre lengh (m) | 10                    |
| Head type       | 90°                   |
| Plug            | M12                   |

|                       |        |
|-----------------------|--------|
| Jacket material       | PVC    |
| Model                 | Female |
| Test/Approvals        |        |
| Degree of protection  | IP67   |
| Generical Data        |        |
| Mechanical Protection | IP67   |


# CONNECTIONS

Eletrical diagram

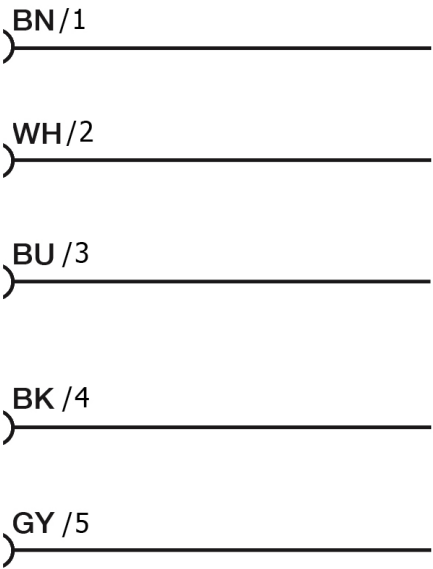

# OTHERS

Dimensions

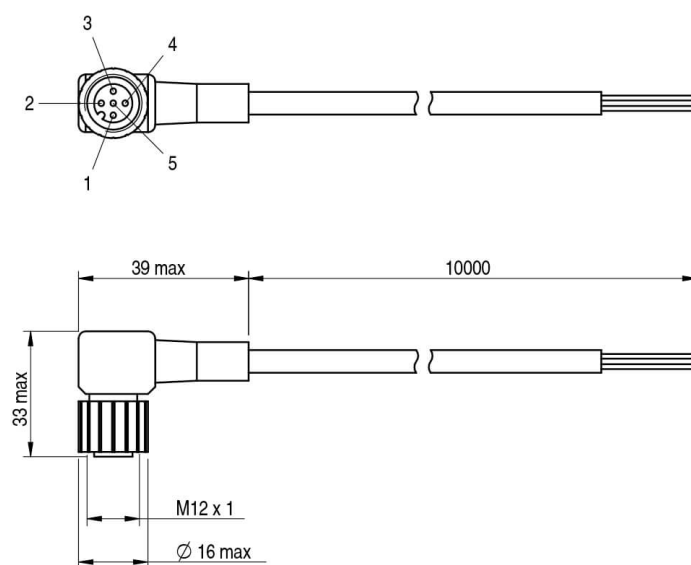

## Datasensing S.r.l.

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
[info@datasensing.com](mailto:info@datasensing.com)

**date of  
printing**  
10/08/2026  
03:40:48