



CD

CD12M/0H-150A3

Connect.M12-F,5 poles-15m,PVC,Axial

TECHNICAL FEATURES

Application

Usable with

Safety light curtains: • LS2 BASE (TX and RX) • LS2 STANDARD (TX) • LS4 BASE (TX and RX) • LS4 STANDARD (TX) Safety sensors: • SH and TH • SH-IC and TH-IC

Installation

M12 5 poles axial female connector

Electrical data

Led

no

Wires

5

Mechanical data

Connections

With open ended wires

Fibre lengh (m)

15

Head type

Axial


Plug

M12

Jacket material	PVC
Model	Female
Test/Approvals	
Degree of protection	IP67
Generical Data	
Mechanical Protection	IP67


CONNECTIONS

Eletrical diagram

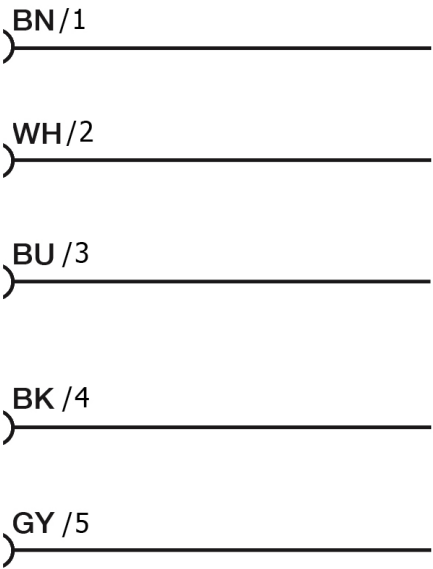

OTHERS

Dimensions

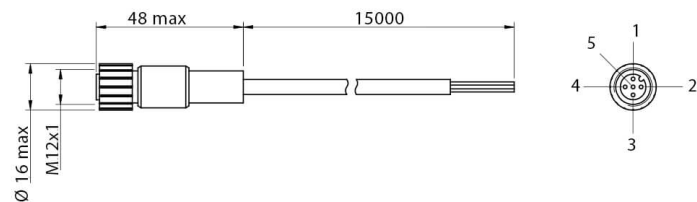

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
03:21:53