



CD

CD12M/0H-250A3

Connect.M12-F,5 poles-25m,PVC,Axial


TECHNICAL FEATURES

Application	
Usable with	Safety light curtains: • LS2 BASE (TX and RX) • LS2 STANDARD (TX) • LS4 BASE (TX and RX) • LS4 STANDARD (TX) Safety sensors: • SH and TH • SH-IC and TH-IC
Installation	M12 5 poles axial female connector
Electrical data	
Led	no
Wires	5
Mechanical data	
Connections	With open ended wires
Fibre lengh (m)	25
Head type	Axial
Plug	M12

Jacket material	PVC
Model	Female
Test/Approvals	
Degree of protection	IP67
Generical Data	
Mechanical Protection	IP67


CONNECTIONS

Eletrical diagram

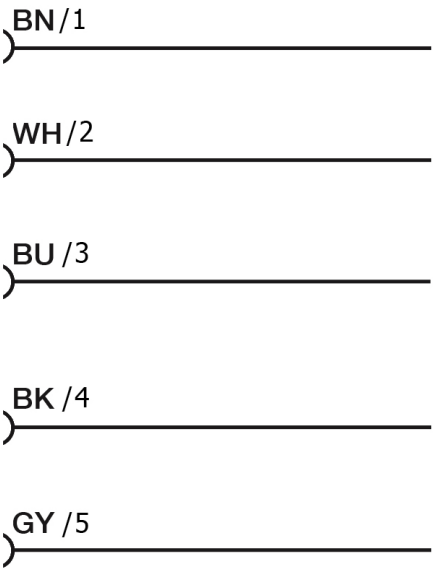

OTHERS

Dimensions

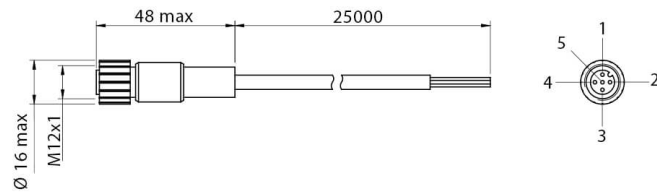

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
00:14:10