



# CD

## CD12M/0X-050A5

Connect.M12-F,8 poles-5m,PUR,Axial

## TECHNICAL FEATURES

### Electrical data

Nominal current	2 A
Led	no
Wires	8
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 30 V ac/dc

### Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Fibre length (m)	5
Head type	Axial
Plug	M12

Outer diameter	Ø 6,4 mm ± 0,2 mm
Jacket material	TPU
Wire isolation	PP
Conductors section	0,34 mm <sup>2</sup> (42 x 0,10 mm <sup>2</sup> )
Model	

#### Test/Approvals

Degree of protection	IP67
----------------------	------

#### Generical Data

Operating Temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Mechanical Protection	IP67

## CONNECTIONS

Eletrical diagram

) BN/1 \_\_\_\_\_

) WH/2 \_\_\_\_\_

) BU/3 \_\_\_\_\_

) BK/4 \_\_\_\_\_

) GY/5 \_\_\_\_\_


) PK / 6 \_\_\_\_\_

) VT / 7 \_\_\_\_\_

) OR / 8 \_\_\_\_\_

## OTHERS

### Dimensions

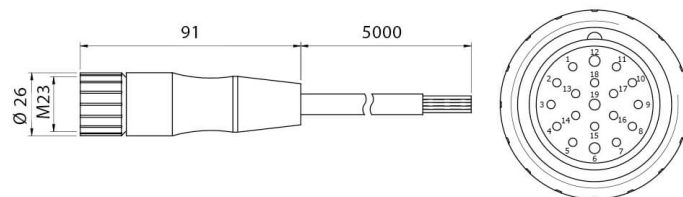

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)

**date of  
printing**  
19/06/2026  
11:44:49

Tel. 059 420411  
Fax 059 253973  
E-mail  
[info@datasensing.com](mailto:info@datasensing.com)