



CD

CD12M/0X-100A5

Connect.M12-F,8 poles-10m,PUR,Axial

TECHNICAL FEATURES

Electrical data

Nominal current	2 A
Led	no
Wires	8
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 30 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Fibre lengh (m)	10
Head type	Axial
Plug	M12

Outer diameter	Ø 6,4 mm ± 0,2 mm
Jacket material	TPU
Wire isolation	PP
Conductors section	0,34 mm2 (42 x 0,10 mm2)
Model	

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Mechanical Protection	IP67


CONNECTIONS

Eletrical diagram

BN/1	
WH/2	
BU/3	
BK/4	
GY/5	
PK/6	
VT/7	
OR/8	

OTHERS

Dimensions

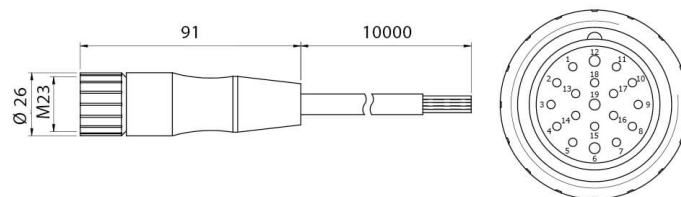

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
10/08/2026
00:06:43

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com