



CD

CD12M/0X-150A5

Connect.M12-F,8 poles-15m,PUR,Axial

TECHNICAL FEATURES

Electrical data

Nominal current	2 A
Led	no
Wires	8
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 30 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Fibre lengh (m)	15
Head type	Axial
Plug	M12

Outer diameter	Ø 6,4 mm ± 0,2 mm
Jacket material	TPU
Wire isolation	PP
Conductors section	0,34 mm2 (42 x 0,10 mm2)
Model	

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Mechanical Protection	IP67


CONNECTIONS

Eletrical diagram

- BN/1
- WH/2
- BU/3
- BK/4
- GY/5
- PK/6
- VT/7
- OR/8

OTHERS

Dimensions

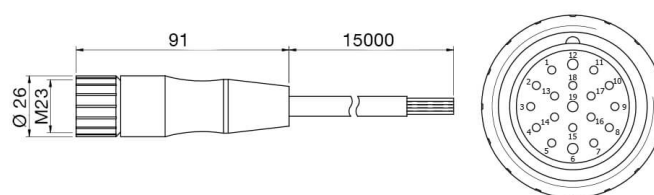

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com