



CD

CD12M/AC-050C5

Connect.1/2"-20UNF-F,3 poles-AC,PUR,90°

TECHNICAL FEATURES

Electrical data

Nominal current

4 A

Led

No

Wires

2+PE

Rated impulse voltage

2 kV

Nominal voltage

Max. 250 V ac/dc

Mechanical data

Connections

With open ended wires

Tightening torque

0,6 Nm

Operating temperature

-10°C ...+80°C (flexible installation)-25°C...+80°C (fixed installation)

Fibre length (m)

5

Head type

90°

Plug	1/2" - 20UNF
Outer diameter	Ø 4,6 mm ± 5%
Jacket material	TPU
Wire isolation	PVC
Conductors section	0,50 mm2
Model	

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-10°C ...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram



YE-GN/1

BN/2

BU/3

OTHERS

Dimensions

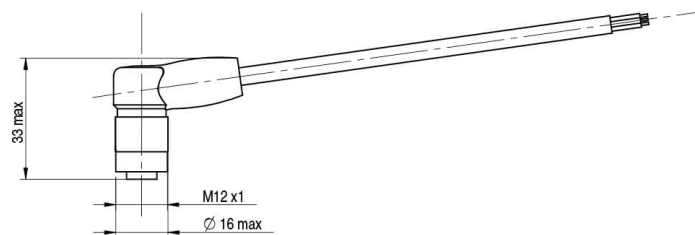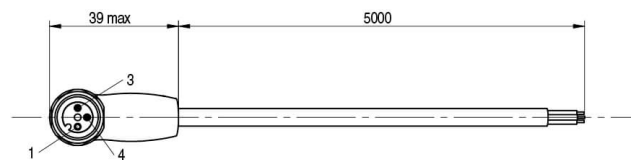

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
10/08/2026
07:24:45

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com