



CD

CD12M/LB-050C5

Connect.M12-F,4 poles-5m-LED,PUR,90°

TECHNICAL FEATURES

Electrical data

Nominal current	4 A
Led	3 (Supply - PNP output pin 4-2)
Wires	4
Nominal voltage	250 V

Mechanical data

Connections	With open ended wires
Operating temperature	-40°C ... +80°C (fixed installation) '-25°C ... +80°C (flexible installation)
Fibre lengh (m)	5
Head type	90°
Plug	M12

Outer diameter	Ø 4,7mm ±0.20mm
Jacket material	TPU
Wire isolation	PP
Bending radius	> 5 x D (fixed installation) > 10 x D (flexible installation)
Model	

Test/Approvals


Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-40°C ... +80°C (fixed installation) '-25°C ... +80°C (flexible installation)
Mechanical Protection	IP67



CONNECTIONS

Eletrical diagram

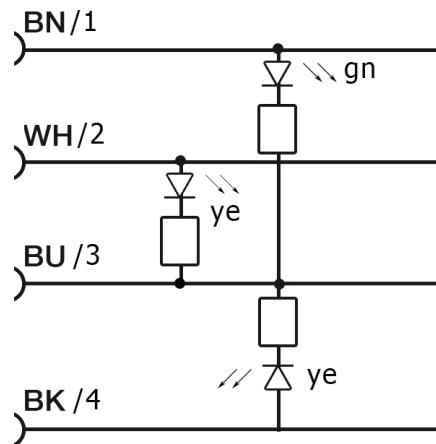

OTHERS

Dimensions

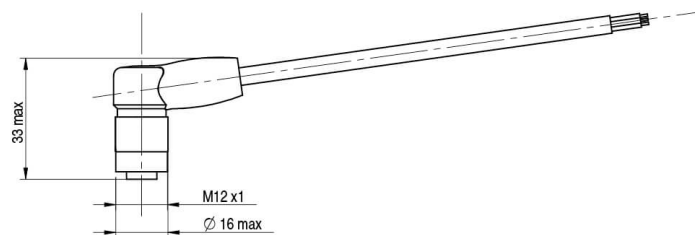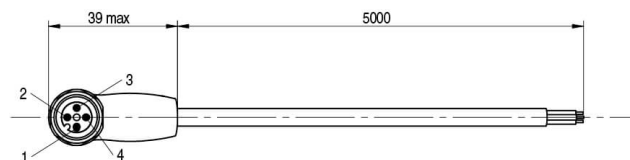

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)

**date of
printing**
09/08/2026
23:35:21

Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com