



CD

CDV-50

Connect.M12-M-Axial,Terminals,4 p

TECHNICAL FEATURES

Electrical data

Nominal current	4 A
Led	no
Wires	4
Nominal voltage	60 Vdc - 48 Vac


Mechanical data

Material	nickel-plated brass
Connections	to solder
Plug	M8
Outer diameter	ø 5 mm
Plug connector material	polyamide 66 GV, V0 UL94
Contacts material	nickel-plated brass with surface gold-plating

O-Ring material	NBR 72
Model	Male
Test/Approvals	
Degree of protection	IEC IP65
Generical Data	
Mechanical Protection	IEC IP65

OTHERS

Dimensions

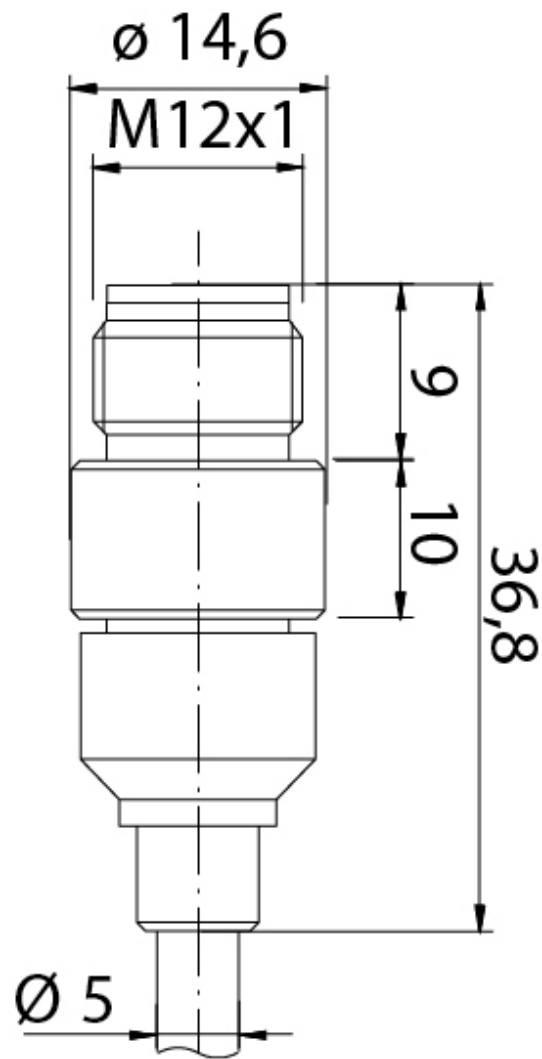

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**

11/08/2026
03:55:56