



CD

CL08/1A-00A

Connect.M8-F-Axial,3 p,Field attach.

TECHNICAL FEATURES

Application

Fixing

Fast connections

Electrical data

Rated current

a 40°C 4 A

Led

no

Wires

3

Insulation resistance

$\geq 100 \text{ M}\Omega$

Contact resistance

$\leq 5 \text{ m}\Omega$

Rated voltage

60 V (3 plugs) 30 V (4 plugs)

Mechanical data

Connections

Field attachable

Tightening torque

0,2 Nm (M8 nut)

Operating temperature

-40 °C ... 85 °C

Head type	Axial
Plug	M8
Outer diameter	3,5 mm ... 5 mm
Stripping lenght of the sheath	12 mm
Wire isolation	$\geq 100\text{ M}\Omega$
Conductors section	0,14 mm ² ...0,5 mm ²
Model	Female

Test/Approvals


Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-40 °C ... 85 °C
Mechanical Protection	IP67

OTHERS

Dimensions

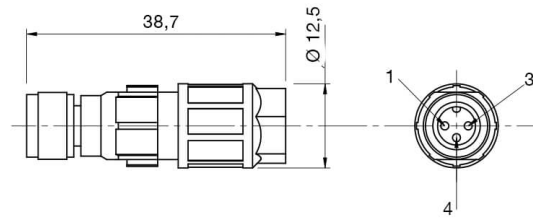

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
02:15:36