



CD

CV08/1B-00A

Connect.M8-M-Axial,4 p,Field attach.

TECHNICAL FEATURES

Application

Fixing	spring terminals
--------	------------------

Electrical data

Rated current	a 40°C 4 A
---------------	------------

Led	no
-----	----

Wires	4
-------	---

Insulation resistance	$\geq 100 \text{ m}\Omega$
-----------------------	----------------------------

Contact resistance	$\leq 5 \text{ m}\Omega$
--------------------	--------------------------

Rated voltage	60 V (3 plugs) 30 V (4 plugs)
---------------	-------------------------------

Mechanical data

Tightening torque	0,6 Nm (pressure nut) 0,2 Nm (M8 nut)
-------------------	---------------------------------------

Operating temperature	-25 °C ... 80 °C
-----------------------	------------------

Head type	Axial
-----------	-------

Plug	M8
Outer diameter	2,5 mm...5 mm ±0,2 mm
Stripping lenght of the sheath	40 mm
AWG conductors section	AWG 24 ... 20
Conductors section	0,25 mm²...0,5 mm²
Model	Male

Test/Approvals


Degree of protection	IP65 / IP67
----------------------	-------------

Generical Data

Operating Temperature	-25 °C ... 80 °C
Mechanical Protection	IP65 / IP67

OTHERS

Dimensions

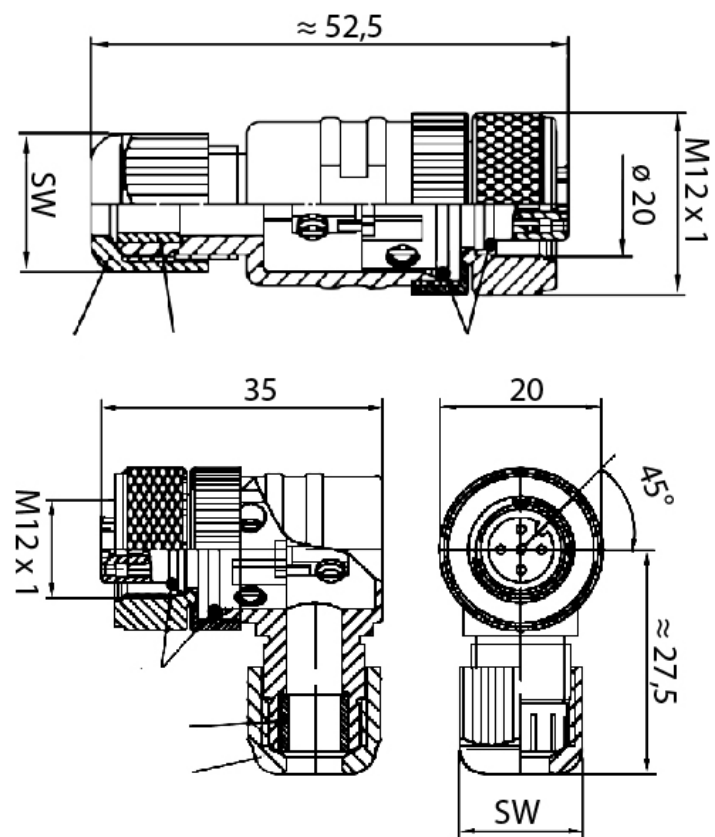

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
00:06:21